

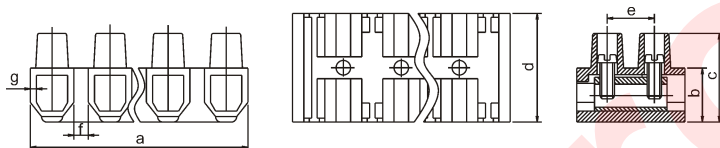


Модель	Ссылка	Ед.и.	a	b	c	d	e	f	g
H-3A-4mm ²	H040061	(мм)	94	7	13	16	6	2.5	0.9
H-5A-4mm ²	H060066	(мм)	109	8	14	16	6	3	0.9
H-6A-6mm ²	H060073	(мм)	113	9	14	18	8	4	1
H-10A-10mm ²	H100093	(мм)	128	10	16.5	20	8.2	4	1
H-15A-12mm ²	H120125	(мм)	135	11	20.5	23	11.2	4	1.2
H-30A-16mm ²	H160192	(мм)	167	11.5	21.5	25	11.2	5	1.3
H-60A-25mm ²	H250321	(мм)	192	16	26	30	13.1	5	1.8
H-80A-30mm ²	H300520	(мм)	208	18	31	38	15	4	2.0
H-100A-35mm ²	H350650	(мм)	230	20	34	38	16	4	2.6
H-150A-40mm ²	H401100	(мм)	266	25	34	45	21	3	3.2

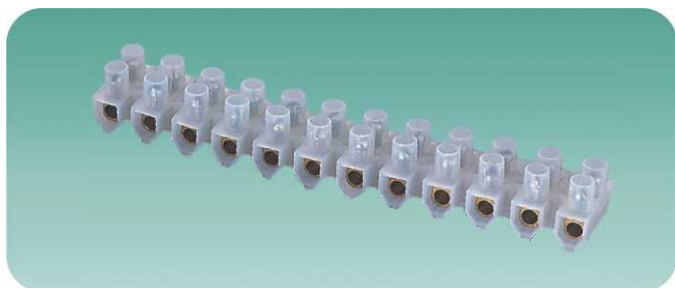

Модель	Ссылка	Ед.и.	a	b	c	d	e	f	g
F-3A-4mm ²	F040061	(мм)	93	7.4	13.5	16	6	2.5	0.9
F-6A-6mm ²	F060073	(мм)	112	8	14.5	17	8	4	1.0
F-10A-10mm ²	F100095	(мм)	120	9	15.5	20	8.2	3	1.1
F-15A-12mm ²	F120125	(мм)	130	10	18.5	21	11	3.5	1.4
F-30A-16mm ²	F160192	(мм)	160	12	20.5	23.5	12	4	1.4
F-30A-16mm ²	F160196	(мм)	160	12	20.5	26	12	3	1.5
F-60A-25mm ²	F250321	(мм)	191	16	25	30	13.5	4	1.8
F-80A-30mm ²	F300485	(мм)	203	18.5	29	37	16	3	2.6

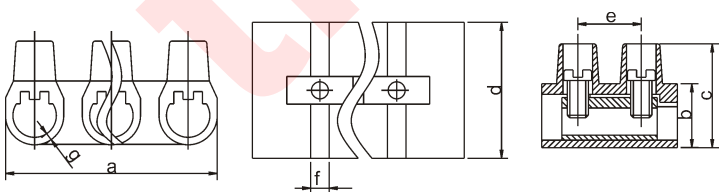

Модель	Ссылка	Ед.и.	a	b	c	d	e	f	g
W-3A-4mm ²	W040061	(мм)	93	7	12.5	16	6	3	0.9
W-5A-4mm ²	W060066	(мм)	112	8	13	15	7	3	0.9
W-6A-6mm ²	W060073	(мм)	102	8	14	18	8	2.5	1.0
W-10A-10mm ²	W100095	(мм)	125	9	15	20	9	3	1.2
W-15A-12mm ²	W120125	(мм)	134	10	17	21	11	3	1.3
W-20A-16mm ²	W120130	(мм)	140	10	18	22	11	3.5	1.4
W-30A-25mm ²	W160196	(мм)	171	12	20.5	25	12	4	1.5
W-60A-30mm ²	W250321	(мм)	191	16	25	30	13.5	4	1.8
W-80A-30mm ²	W300485	(мм)	203	18.5	29	37	16	3	2.6

Количество контактов: 1-12
 Испытано и рекомендовано к применению: **CE**
 Материал корпуса: PE
 Рабочая температура: 80°C