

# HFE7


## SUBMINIATURE INTERMEDIATE POWER RELAY



File No.:E134517



File No.:40027342

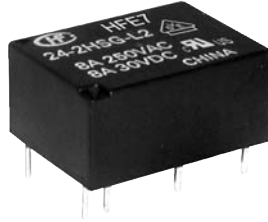

### Features

- High switching capacity  
1A, 1B: 10A 250VAC/30VDC;  
2A, 2B, 1A + 1B: 8A 250VAC/30VDC
- High sensitive
- 4kV dielectric strength (between coil & contacts)
- Single side stable and latching types available
- 1 Form A, 1 Form B, 2 Form A, 2 Form B and 1A + 1B contact arrangement
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.0 x 15.0 x 10.2) mm

### CONTACT DATA

Contact arrangement	1A, 1B	2A, 2B, 1A + 1B
Contact resistance	AgNi +Au plated: 30mΩ max.(at 1A 6VDC) AgNi: 50mΩ max.(at 1A 6VDC) AgSnO <sub>2</sub> +Au plated: 60mΩ max.(at 1A 6VDC) AgSnO <sub>2</sub> : 80mΩ max.(at 1A 6VDC)	
Contact material	AgSnO <sub>2</sub> , AgNi	
Contact rating (Res. load)	10A 250VAC / 30VDC	8A 250VAC / 30VDC
Max. switching Voltage	277VAC	277VAC
Max. switching current	10A	8A
Max. switching power	2500VA	2000VA
Mechanical endurance	1 x 10 <sup>7</sup> OPS	
Electrical endurance	1A, 1B type: 1 x 10 <sup>5</sup> OPS (10A 250VAC, Resistive load., at 70°C, 1.5s on 1.5s off) 1A +1B, 2A, 2B type: 3 x 10 <sup>4</sup> OPS (8A 250VAC, Resistive load., at 70°C, 1.5s on 1.5s off)	

### CHARACTERISTICS

Insulation resistance		1000MΩ (at 500VDC)
Dielectric Strength	Between coil & contacts	4000VAC 1min
	Between open contacts	1000VAC 1min
Operate time (single side stable)		10ms max.
Release time (single side stable)		10ms max.
Set time (latching)		10ms max.
Reset time (latching)		10ms max.
Max. operate frequency (under rated load)		20 cycles /min
Temperature rise (at nomi. volt.)		50 K max.
Vibration resistance		10Hz to 55Hz 1.5mm DA
Shock resistance		98m/s <sup>2</sup>
Humidity		5% to 85% RH
Ambient temperature		-40 °C to 70 °C
Termination		PCB
Unit weight		Approx. 6g
Construction		Plastic sealed, Flux proofed

Notes: The data shown above are initial values.

### COIL

Type		Coil power	
		Sensitive	High sensitive
Single side stable	1A,1A+1B	Approx. 420mW	Approx. 200mW
	2A		Approx. 280mW
Single coils latching		Approx. 300mW	Approx. 200mW
Double coils latching		Approx. 420mW	Approx. 280mW

### COIL DATA

at 23°C

#### Single side stable

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Coil Resistance x (1±10%)Ω		
			200mW	280mW	420mW
3	2.1	0.3	45	32.1	21.4
5	3.5	0.5	125	89.3	59.5
6	4.2	0.6	180	129	85.7
9	6.3	0.9	405	289	192.9
12	8.4	1.2	720	514	342.9
24	16.8	2.4	2880	2056	1371.4

#### Single coil latching

Nominal Voltage VDC	Set /Reset Voltage VDC max.	Pulse Duration ms min.	Coil Resistance x (1±10%)Ω	
			300mW	200mW
3	2.1	50	30	45
5	3.5	50	83.3	125
6	4.2	50	120	180
9	6.3	50	270	405
12	8.4	50	480	720
24	16.8	50	1920	2880



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2016 Rev. 1.00

## COIL DATA

at 23°C

### Double coils latching

Nominal Voltage VDC	Set / Reset Voltage VDC max.	Pulse Duration ms min.	Coil Resistance x (1±10%) Ω	
			420mW	280mW
3	2.1	50	21.4+21.4	32.1+32.1
5	3.5	50	59.5+59.5	89.3+89.3
6	4.2	50	85.7+85.7	129+129
9	6.3	50	192.9+192.9	289+289
12	8.4	50	342.9+342.9	514+514
24	16.8	50	1371.4+1371.4	2056+2056

## SAFETY APPROVAL RATINGS

UL/CUL	1 Form A	AgNi	10A 250VAC 8A 30VDC 1/4HP 125VAC 1/3HP 250VAC
		AgSnO <sub>2</sub>	10A 30VDC B300, R300 10A 250VAC 1/4 HP 125VAC 1/3 HP 250VAC
	2 Form A	AgSnO <sub>2</sub> , AgNi	8A 250VAC/30VDC 1/4HP 125VAC 1/3HP 250VAC
		AgSnO <sub>2</sub>	600W 125VAC B300, R300
	1 Form A+1 Form B	AgSnO <sub>2</sub> , AgNi	8A 250VAC/30VDC 1/4HP 125VAC 1/3HP 250VAC
		AgSnO <sub>2</sub>	B300, R300
VDE (No UL approval on Single side stable version)	1 Form A	AgNi	10A 250VAC (cosφ=1) 5A 250VAC (cosφ=0.4)
	2 Form A	AgNi	8A 250VAC (cosφ=1) 3.5A 250VAC (cosφ=0.4)
	1 Form A+1 Form B	AgNi	8A 250VAC (cosφ=1) 3.5A 250VAC (cosφ=0.4)
		AgNi	3.5A 250VAC (cosφ=0.4)

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

## ORDERING INFORMATION

Type	HFE7 /	12	-1H	S	T	G	-L2	-R	(XXX)	(XXX)
Coil voltage	3, 5, 6, 9, 12, 24VDC									
Contact form	1 <sup>1)</sup> 1H: 1 Form A 1D: 1 Form B 2 <sup>2)</sup> 2H: 2 Form A 2D: 2 Form B 1HD: 1A + 1B									
Construction	2 <sup>2)</sup> S: Plastic sealed Nil: Flux proofed									
Contact material	3 <sup>3)</sup> T: AgSnO <sub>2</sub> Nil: AgNi									
Contact plating	G: Gold plated Nil: No gold plated									
Sort	L1: 1 coil latching L2: 2 coils latching Nil: Single side stable									
Polarity	R: Negative polarity Nil: Positive polarity									
Customer special code (Coil power)	4 <sup>4)</sup> (412): Sensitive Nil: High sensitive									
Special code	5 <sup>5)</sup> XXX: Customer special requirement Nil: Standard									

Notes: 1) 1H, 2H means that relay is on the "reset" status when delivery; 1D, 2D means that relay is on the "set" status when delivery. There are no UL approval on 1D, 2D version.


2) Under the ambience with dangerous gas like H<sub>2</sub>S, SO<sub>2</sub> or NO<sub>2</sub>, plastic sealed type is recommended; Please test the relay in real applications. If the ambience allows, flux proofed type is preferentially recommended. Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.

3) For the application with inrush current conditions, such as lamp load, motor load, capacitance load, coil load, etc., we suggest use the flux proof and no golden plated AgSnO<sub>2</sub> contact version.


4) We recommend to choose the sensitive version (same part number, but with special suffix (412)) if the higher coil activation is allowable; Please choose the sensitive version (same part number, but with special suffix (412)) if the relay to be used in the extreme environment or welded by wave soldering; Please check with HF's engineer before designing the relay to your application if there are some requirements' outside the specification we provided.

5) The customer special requirement express as special code after evaluating by Hongfa. e.g. (359) stands for Lamp load.

## Outline Dimensions

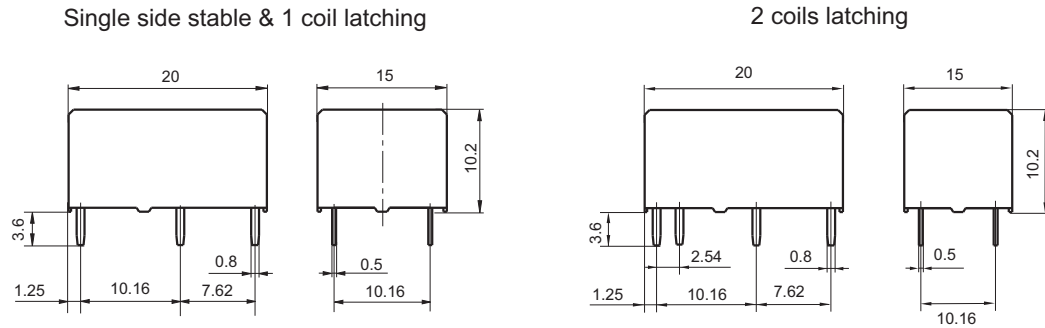


## PCB Layout (Bottom view)

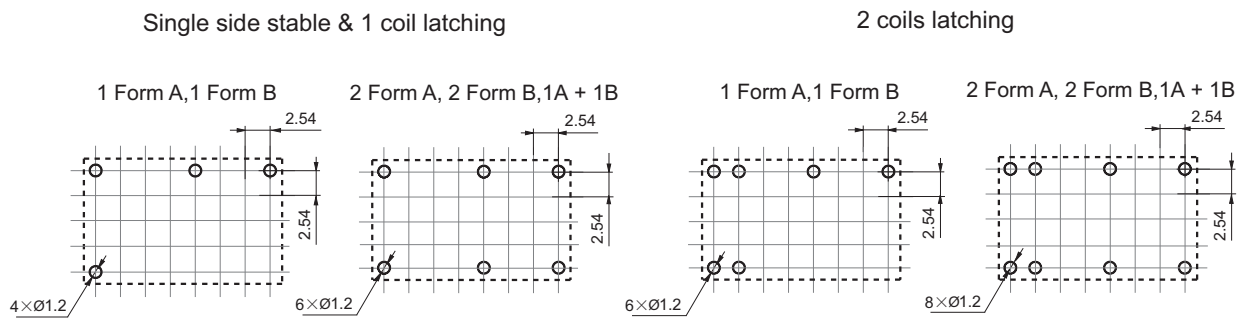


- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .  
 2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .  
 3) The width of the gridding is  $2.54\text{mm}$ .

## Wiring Diagram (Bottom view)


### Single side stable (Standard polarity)

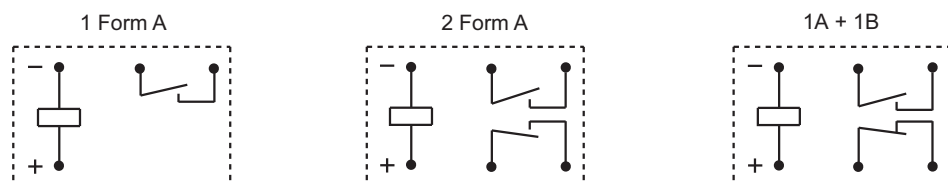

### Single side stable (Reverse polarity)

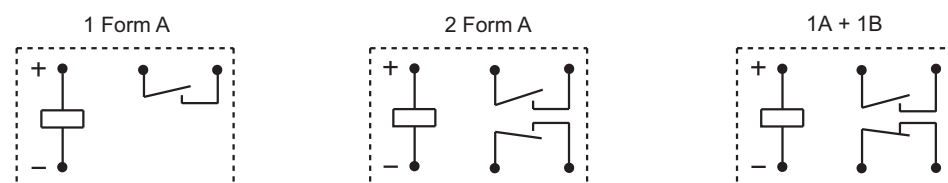

Wiring Diagram (Bottom view)

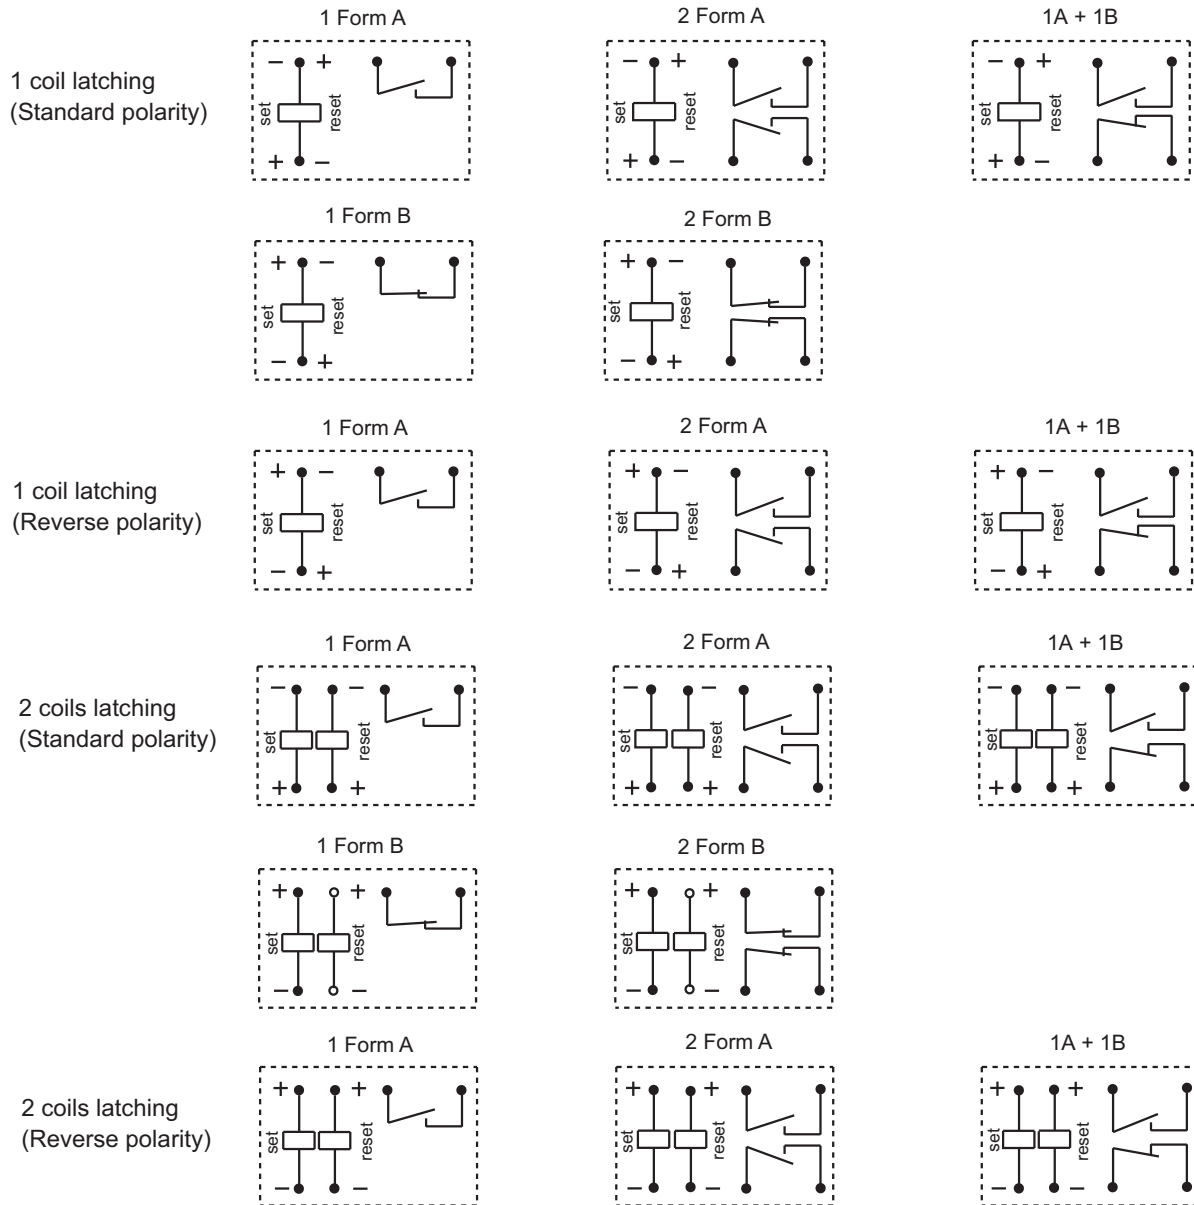

## Notice:

- Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application ( connecting the power supply), please reset the relay to "set" or "reset" status on request.
- In order to maintain "set" or "reset" status, energized voltage to coil should reach the rated voltage, impulse width should be 5 times more than "set" or "reset" time. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
- As the relay component part's will shrink and deformed due to the high temperature impact, our products are forbidden to be used at the temperature outside our suggested working temperature range (-40℃ to 70℃) for long time ; If the wave soldering will be used, the operating parameters we will suggest are: Up limit of the pre-heating time: 120s; Up limit of the pre-heating temperature:120℃; Soldering temperature: 260℃±5℃; Soldering time (10±3) s; Besides our suggested parameters, please try to shorten the pre-heating time and the soldering time and try to lower the temperature for pre-heating and the soldering as you can; the manual soldering for such relay is more recommended.

## Disclaimer

The specification is for reference only. Specifications subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

## Таблица возможной замены реле

### силовые реле

HONGFA	TIANBO	SONGLE	HELISUN	OMRON
HF3FF	HJR-3FF	SRD(T73)	HLS8-T73	G5L
HF10FF-2			<b>HLS-MK2P</b>	MK2
HF10FF-3Z			HLS-MK3P	MK3
HF13F			<b>HLS-13F</b>	
HF18FF	HJQ-22		HLS-4453(18F)-4	MY4
HF21FF	HJR-21FF	SRU(22F)	HLS8-22F	G5L-E
HF32F	TRG1	SRSB	HLS-32F	835/835NL
HF32FA/32FA-T	TRG1	SRSB	HLS-32F	835/835NL
HF32FA-G	TRG1	SRSB	HLS-32F	835/835NL
HF33F	TRG2	SRSC	HLS-33F	G5SB
HF62F	TRA2F	SMIH(14FHA)	<b>HLS-14FK</b>	G5J
HF46F/HF46F-G	TRGB			202/202H
HF49FD				G5J
HF102F	TRAF		HLS-102F	G4A
HF115F	TRC2	SMIH(14FH)	HLS-14F2	G2RL
HF115FP	TRC3	SMIH(14FH)	HLS-14F3	
HF140FF	TRA3		HLS-14F	G2R/G2RG
HF13F	HJQ-13F-2C	SMB(13F)	HLS-13F-2	LY2
HF2100	HJQ-15F-1	SLC(T91)	HLS-T91(16F)-1	G7G
HF105F - 4	HJQ-15F-3	SLCH(T92)		
HF105F-1	HJQ-15F	SLA(T90)	HLS-T90(15F)	G8P
HF2160	HJQ-15F-2	SLI(T93)	HLS-T91(16F)-2	G7G/G8G
HF165FD	HJQ-15F	SLA	HLS-T90(15F)	G8P
JQC-21FF	HJR-21FF	SRD(T73)	HLS8-22F	
HF7FF	HJR-7FF	SRG(4123)	HLS8-T73	
HF141FF	TRA1		HLS-14F1	G2R
HF14FW	TRA2	SMIH(14FH)	<b>HLS-14F2</b>	G2R
HF14FF	TRA1		HLS-14F	G2R
HF36F	TRA4			
HF42F	TRA5			G5PA-2
HF8	TRDH	SRI(T72)	HLS-T72	
HF102F			HLS-102F	G4A
HLS-4453(18F)-2		SMBH(4453)	HLS-4453(18F)-2	MY2
HF18FF-3Z			HLS-4453(18F)-3	MY3

### сигнальные реле

HONGFA	TIANBO	SONGLE	HELISUN	OMRON
HFD2	HJR1	SRC	HLS-4078	G5V-2
HFD4				
HFD27	HJR1-2	SRC	HLS-4078	G5V-2
HFD41	HJR4102	SRS		
HF41F			HLS6-4100H-1	G2E
HM4101F	HJR4102E			
HFD23			HLS6-23F	G5V-1

### автомобильные реле

HONGFA	TIANBO	SONGLE	HELISUN	OMRON
HFKM, HFKS	TRAW	SLE(4117)	HLS-4117	
HVF6	TRFM			G8HN
HFKP	TRKP	SLB	HLS-4120	G8PE
	TRS			
	TRV3			
HV4	TRV4	SLD	HLS-CMA3	G8JN
	TRV5			
HV7	TRV6	SLDH	HLS-CMA3-1	G8JR
HFKW	HJR78F	SRA(T74)	HLS-T78	G8QN
			HLS-4121/4122	
HV6		SLM	HLS-CMA6	G8H