

Doc.code	
No.	

# DATA SHEET

**Model No:EACO-DECMIVCBPXBD020**  
DC12v/24v 1A/per-channel cable&connector

Customer Approval	APPROVAL BY	CHECKED BY	PREPARED BY



**ELUMINA TECHNOLOGY INC.**

12F, No.237, Songjiang Rd., Taipei 104, Taiwan R. O. C.

Tel:+886-2-2517-4870

Fax:886-2-2517-3380

<http://www.eluminatech.com>

## DMX512 Control

### Mini Decoder

#### ◆ FEATURE

- Energy efficient switch mode power electronics
- Long Life Design
- High quality rugged construction



#### Typical Applicatic

- Floodlighting
- RGB Colour Mixing
- DMX512
- Cove & Cornice Lighting
- Signal
- Fibre Optic systems
- Architectural Lighting


#### ◆ SPECIFICATION

Parameter	Conditions	Min	Type	Max	Unit
Working Voltage	DC	12	24	24	V
Working Current	DC 24V No load	30	40		mA
Expend Power Watts	DC24V		0.96		W
Output Voltage	DC	12 / 24V Follow Input			V
Driver Current	DC	1 (R/G/B per Chanel)			A
DMX connector		3 PIN Female cable+Connector /3 PIN male cable+ Connector			
Output connector		4 PIN IP65 Female Connector			
Connector(Source)		2 PIN cable+Connector			
Working Temp.		-5	~	60	°C
Size:(LxW)		47.5 × 24.5			mm
Net Weight		65			g

*In addition to the reliability assurance level check mentioned above. We also perform reliability test to identify the design the design limit and destructive failure and to predict the field reliability of products.*

*Specification subject to change without advance notice*

◆ Product Outline ( mm )

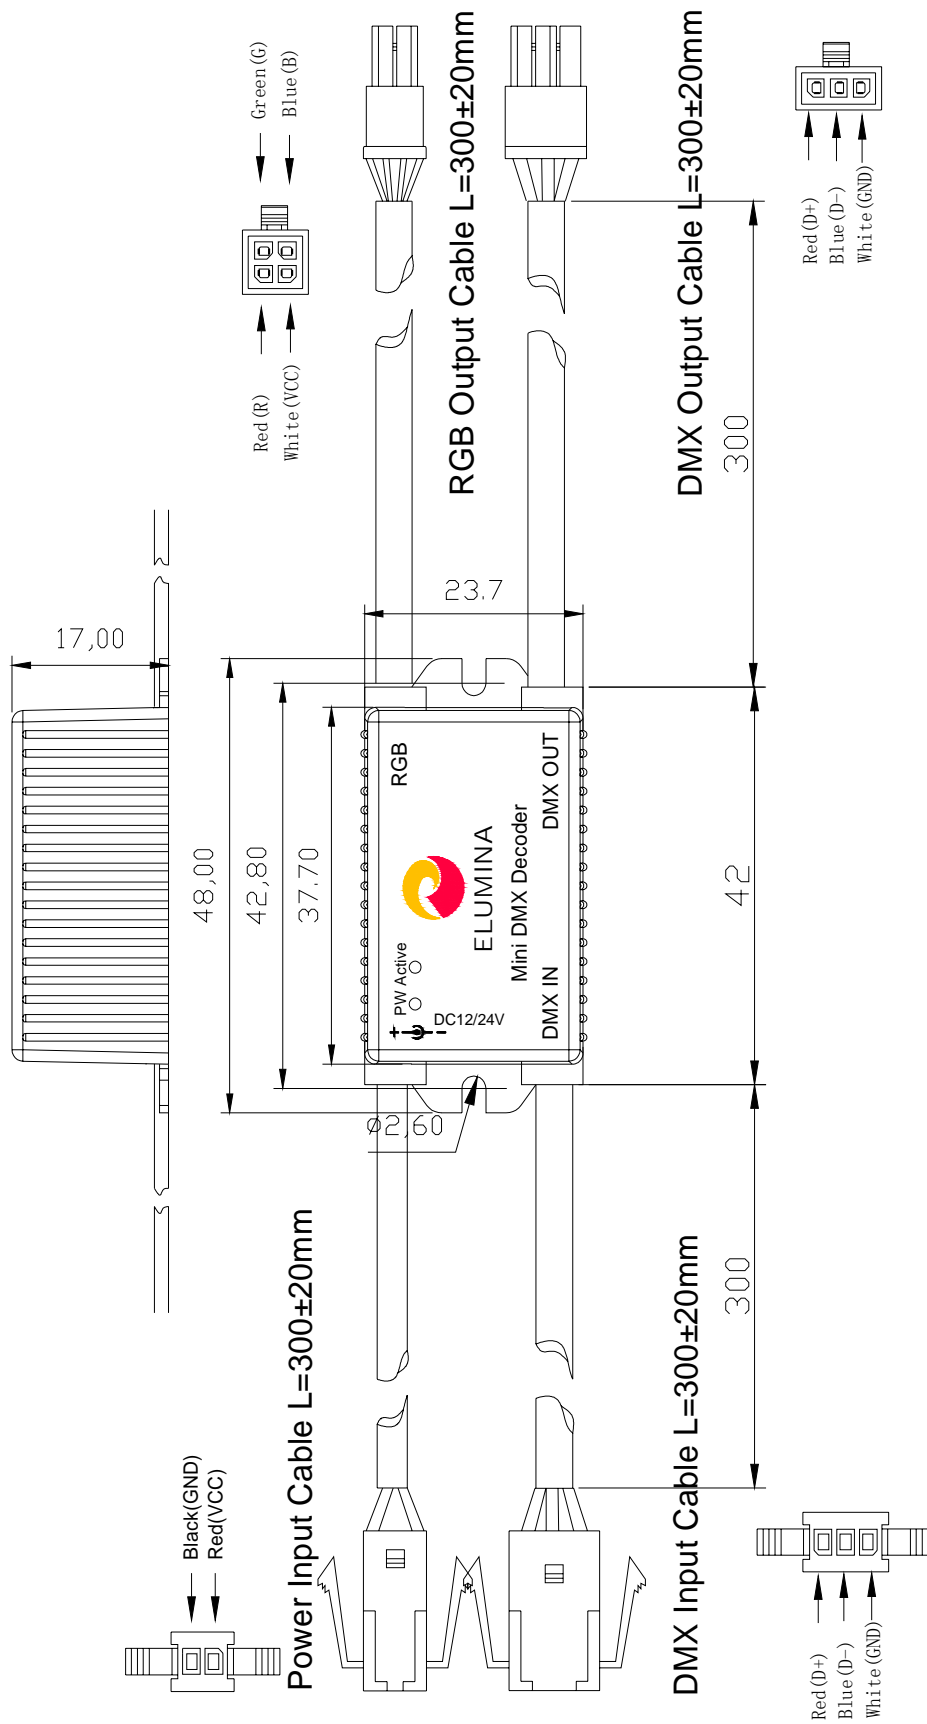

◆ PACKING ( mm )

External Size : L X W X H  
132 x 46 x 35

