



ANSHAN YES OPTOELECTRONICS DISPLAY CO.,LTD

SPECIFICATIONS FOR LIQUID CRYSTAL DISPLAY

Product NO: YDDC3391ABTDRPN

Customer: COMPEL

Checked	Approved	Department
WangYan	LiuWei	

Customer Approval	<input type="checkbox"/> Accept
	<input type="checkbox"/> Reject Comment:
Approved by:	

ANSHAN YES OPTOELECTRONICS DISPLAY CO.,LTD
 ADD: 215# QIANSHAN MIDDLE ROAD, ANSHAN LIAONING P.R.CHINA
 TEL: 86-412-5211790
 FAX: 86-412-5211729 P.C.:114044
 E-Mail : yes @ yes-lcd.com


DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 1 of 11

Revision LIST

Version	Date	Description
1.0	2013-1-29	Initial version

YES

DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 2 of 11

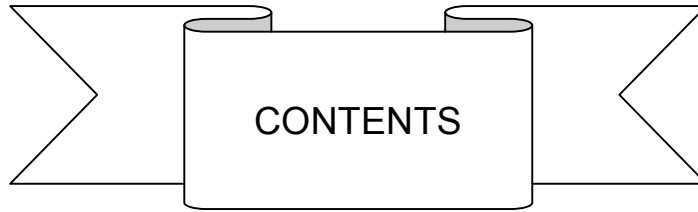

CONTENTS

I . Features.....(4)

II . Mechanical Specifications(4)

III. Absolute maximum rating.....(4)

IV. Technical Specification.....(4-5)

V . Measuring Method and Equipment.....(5-7)

VI. Standard Specifications for Product Quality.....(7-9)

VII. Application Notes.....(10)

VIII. Engineering Drawing.....(11)

YES

DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 3 of 11

I .Features

The features of LCD are as follows

Display mode:	TN Reflective Positive	Viewing Direction	6O'clock
Operation Voltage:	3.0	Connector	pin
Driving Method	DUTY 1/3	BAIS	1/2

II . Mechanical Specifications

No.	Item	Specification	Unit
1	LCD Size	(60.0L)X(22.0W)X(2.85H)	mm
2	Viewing Area	(58.0L)X(16.0W)	mm
3	End Seal	(8.0L)*(0.8T)	mm
4	Remark Enclosed Drawing		

III Absolute maximum rating

NO.	Item	Rating	Unit	Conditions
1	Maximum AC applied voltage	10	V	1 hour
2	Maximum DC applied voltage	2.5	V	100 hours
3	Operating Temperature Range	-20~70	°C	No condensation
4	Storage Temperature Range	-30~80	°C	No condensation

IV. Technical Specification

1. Electro-Optical Characteristics

Measuring Condition: TEMP=(23±3)°C, HUM=(70±5)%RH

NO	Item	Symbol	Min	Type	Max	Unit
1	Operating Voltage	Vop	2.8	3.0	3.2	V
2	Operating Frequency	F		64		Hz
3	Current Consumption	Is				μ A
4	Response Time	Rising Time	Tr	84	130	mS
		Decay Time	Td	28	60	
5	Contrast Ratio	CR	2	3		
6	Viewing Angle (CR≥2)	12H φ =90°	θ 1	6		deg
		6H φ =270°	θ 2	55		
		3H φ =0°	θ 3	55		
		9H φ =180°	θ 4	55		

2. Life

Condition	Hour
Temperature:25°C Humidity:65%RH	50,000Hours

DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 4 of 11

3 .Reliability Test

No.	Items	Test condition	Test result
1	Low temperature operating	Keep in $-20\pm 2^{\circ}\text{C}/96\text{hours}$ Surrounding temperature, then storage at normal condition 24hours	Inspection after 24hours storage at room temperature, the sample shall be free from defects: 1: Background colour 2. bubble. 3. Lc leakage 4. mechanical disrepair/no good. 5. Current consumption 6. short / open 7 crosstalk
2	High temperature operating	Keep in $70 \pm 2^{\circ}\text{C}/96\text{hours}$ Surrounding temperature, then storage at normal condition 24hours	
3	Low temperature storage	Keep in $-30\pm 2^{\circ}\text{C}/96\text{hours}$ Surrounding temperature, then storage at normal condition 24hours	
4	High temperature storage	Keep in $80\pm 2^{\circ}\text{C}/96\text{hours}$ Surrounding temperature, then storage at normal condition 24hours	
5	High temperature high humidity storage	Keep in $40\pm 2^{\circ}\text{C}/90\%\text{RH}$ duration for 96hours Surrounding temperature, then storage at normal condition 24hours	
6	Temperature cycling test	TEMP: ($^{\circ}\text{C}$) 	


Remark:

1. The test samples should be applied to only one test item.
2. Sample size for each item is 3-10pcs.

V. Measuring Method and Equipment

1. Current Consumption Measuring

(1) Equipment

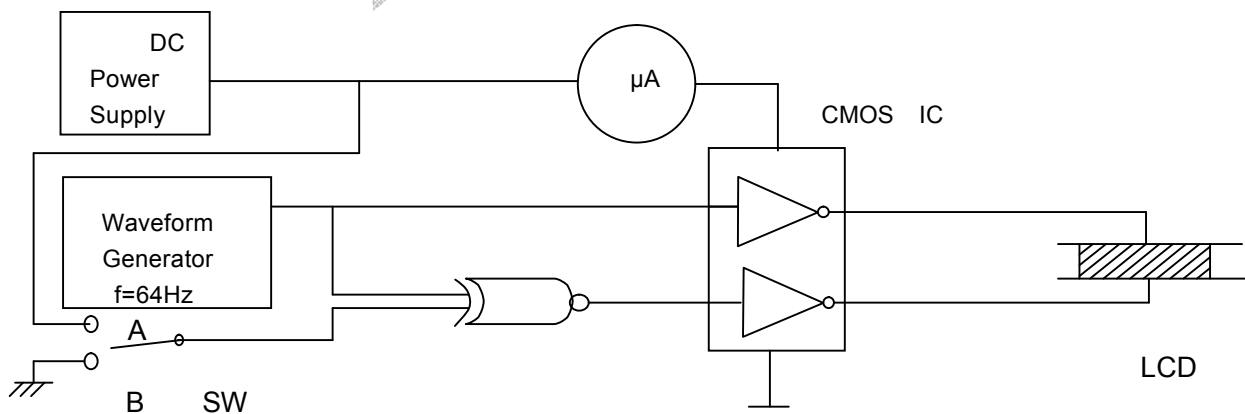

DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 5 of 11


(2) Condition

Operating Frequency: 64Hz

Operating Voltage (rms): Selected Voltage


2. Threshold Voltage and Response Time Measuring

(1) Equipment

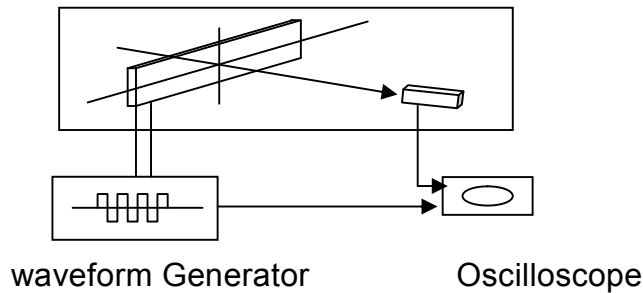


(2) Definition

a. Threshold Voltage (Vth)

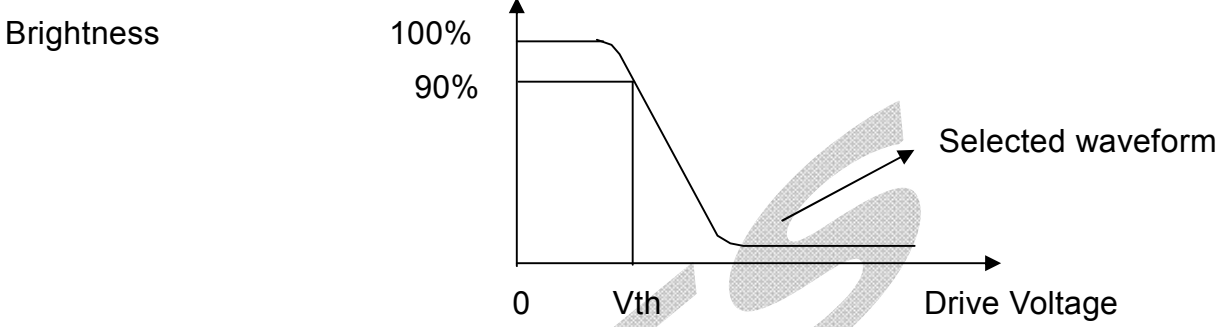

Vth: the voltage (Vop) which the brightness of segment indicates 10%,of saturated value on conditions.

b. Response Time

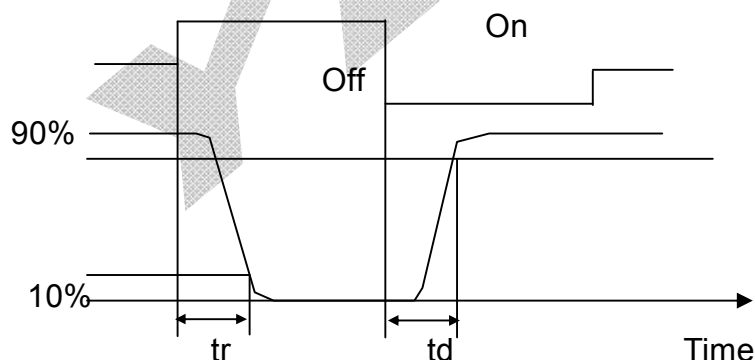


TR : THE TIME REQUIRED WHICH THE BRIGHTNESS OF SEGMENT BECOMES 90% FROM 0% WHEN WAVEFORM IS SWITCHED TO SELECTED ONE FROM NON-SELECTED ONE. : $\Theta = 0^\circ$, $\Phi = 0^\circ$, 64HZ, 0,25°C VOP =3.0V

TD : THE TIME REQUIRED WHICH THE BRIGHTNESS OF SEGMENT BECOMES 10% FROM 100%WHEN WAVEFORM IS SWITCHED TO NON-SELECTED ONE FROM SELECTED ONE. : $\Theta = 0^\circ$, $\Phi = 0^\circ$, 64HZ, 0,25°C VOP = 3.0V

DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 6 of 11


3. Contrast Measuring

(1) Equipment

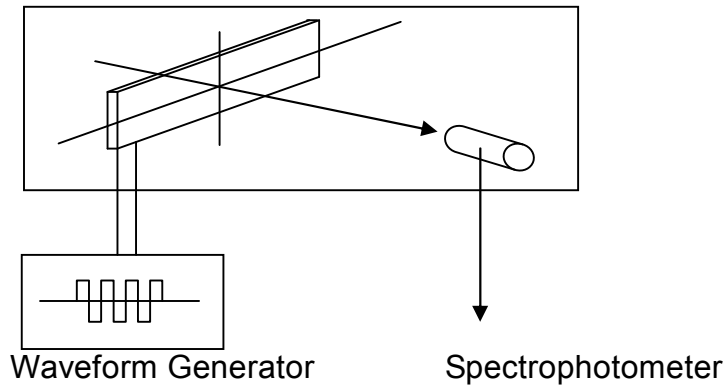

(2) Definition:

a. Viewing Angle:

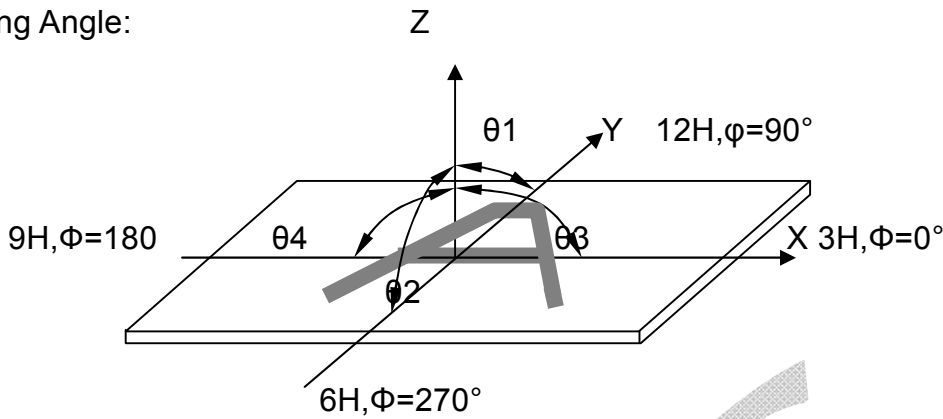

b. Contrast Ratio (positive)

$$CR = \frac{\text{Brightness of non-selected wave-form}}{\text{Brightness of selected wave-form}}$$

VI. Standard Specifications For Product Quality

1. Manner of test:

- 1.1 The test must be under 40W fluorescent light, and the distance of view must be at 30cm.
- 1.2 The test direction is based on around -10° - 30° of Vertical line.

2. Quality specification

It shall be based on GB2828-87, Apply level II, Normal inspection by single sampling.


	IETM	CHECK LEVEL	AQL
MAJOR (MA)	1.LIQUID CRYSTAL LEAKAGE 2.WRONG POLARIZER 3.OUTSIDE DIMENSION 4.SEGMENT MISSING 5.SEGMENT SHORT	II	0.25
MINOR (MI)	1.BLACK SPOTS OR WHITE SPOTS. 2.FOREIGN SUBSTANCE, 3.WHITE SPOTS, 4.PINHOLE,SEGMENT 5.DEFORMATION SCRATCHS(GLASS & POLARIZER), 6.SEGMENT DEFECT, 7.AIR BUBBLES BETWEEN GLASS & POLARIZER, 8.COLOR VARIATION,GLASS CHIPS, 9.OTHER VISUAL DEFECTS.	II	0.65

DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 7 of 11

3. Definition of area:

3.1 I area: viewing area


II area: outside viewing area

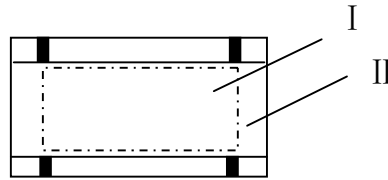

3.2 A area: The glass area outside sealant.

G area: Electrode pad area.

F area: Without electrode pad area.

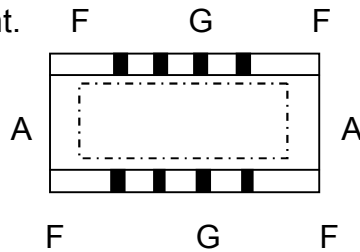

4. Standard of appearance test: (unit: mm)

No	Items	Criterion	Checking manner
1	<p>Substrate crack</p> <p>X: defect Length</p> <p>Y: defect Width</p> <p>Z: defect Depth</p> <p>T: glass Thickness</p> <p>N: defect QTY</p> <p>L: Connector Width</p>	<p>(1) A area</p> <p>$X \leq 2.0$ $Y \leq 0.5$ $Z \geq T/2$</p> <p>$X \leq 2.0$ $Y \leq 1.0$ $Z \leq T/2$ $N \leq 3$</p> <p>$X \leq 0.5$ $Y \leq 0.5$ $Z \leq T/3$ No check</p> <p>(2) G area</p> <p>$X \leq 2.0$ $Y \leq 0.5$ $Z \leq T/2$ $N \leq 2$</p> <p>(1) F area</p> <p>$X \leq 2.0$ $Y \leq 1/4$ or $Y \leq 1.0$ $N \leq 2$</p> <p>$X \leq 2.0$ $Y \leq 2$ $Z \leq T$ $N \leq 3$</p>	checking with eyes
2	<p>Black spot</p> <p>white spot</p> <p>dust</p> <p>polarizer scratch,</p> <p>$D = (X+Y)/2$</p>	<p>(1)</p> <p>$0.15 < D \leq 0.2$ $N \leq 1$</p> <p>$0.1 < D \leq 0.15$ $N \leq 2$</p> <p>$D \leq 0.1$ No check</p> <p>(2)</p> <p>$L \leq 2.0$ $W \leq 0.03$</p> <p>$N \leq 1$</p>	Checking on the table with light and polarizer and checking with eyes directly.

DATE January 29, 2013

Version

1.0

Technical Specification

LCD



YES

YDDC3391ABTDRPN

Page 8 of 11

No	Items	Criterion	Checking manner
3	Polarizer Bubble	$D \leq 0.15$ No check $0.15 < D \leq 0.4$ $N \leq 2$	Checking on the table with light and polarizer, and checking with eyes directly
4	Rainbow Color	Allow tiny rainbow Allow 5% color contrast	Checking on the table with light and polarizer, And checking with eyes directly
5	Sealant	1. Dimension accord design require 2. Immerge depth (d): $1/5D \leq d \leq D$ (D: seal design depth)	Checking with eyes
6	Polarizer or pad appearance	No dirty	Checking with eyes

5 Standard of display test

No	Items	Criterion	Checking manner
1	Pin hole $D = (A+B)/2$ W: segment width	 $W \leq 0.4$ $D \leq 0.20$ And $D \leq 1/2W$ $N \leq 1$ $W > 0.4$ $D \leq 0.25$ And $D \leq 1/3W$ $N \leq 2$ $D \leq 0.05$ No check	Checking at the display state
2	Different width of segment	 $ a-b < 0.25$ or $ a-b \leq 1/4W$ No check	Checking at the display state

DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 9 of 11

VII. Application Notes:

1. Safety Instructions

The liquid in the LCD should not be swallowed or touched. If it accidentally gets on your hands, wash them with water.

2. Handling Instructions

The LCD panel is a glass product developed through precision processing and special orientation treatment. If pressure is applied to the panel, therefore orientation may be disturbed, making it difficult to return to its original condition, it is apt to crack or break easily if it is dropped or hit to a external shock.

3. Mounting Instructions

- a. When connecting a LCD panel to circuit board, it is recommended to use a rubber connector or flexible connector. Direct soldering or mechanical connection is not possible, the pin connected type LCD permits soldering of pins.
- b. When connecting a LCD panel on a circuit, it must be taken care and not apply excessive force on the display surface of the panel with a fingertip, etc., otherwise, it may cause an operating failure or shorten the lifetime of the panel.
- c. Voltage of driving voltage higher than the specified voltage will reduce the lifetime of the liquid crystal display panel.
- d. LCD panels should be handled with care during shipment. If, however, the terminals are contaminated, wipe off with a alcohol.
- e. The polarizer must be handled carefully, because it is soft and apt to suffer damage. The protective panel is attached to the polarizer to avoid damage and contamination, it should be removed just before use as possible.
- f. Use a dry, soft cloth to clean the polarizer, if contamination persists, wipe it off with a small amount of petroleum benzine. Avoid using an organic solvent as much as possible.
- g. When attaching with the heat seal or anisotropical conductive film wipe off with alcohol before use.

4 Storage Instructions

- a. Avoid storage in high temperature and high humidity if long term storage is required keep the panels at a temperature off 10 to 35°C and at a relative humidity of 65% or less.
- b. The LCD unit should be stored in dark place, do not expose it to direct sunlight or fluorescent lamps.
- c. Note that the presence of waterdrops or dew in the LCD panel may deteriorate the polarizer or corrode the electrode.

5. This product can match ROHS Requirements.





DATE January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 10 of 11

VIII. Engineering Drawing

CUSTOMER'S APPROVED: _____ DATE _____ PAGE: 1/1

LCD type:	TN	Drive voltage	3V		Yes Optoelectronics Display Co., Ltd.	Drw
Display mode	Positive	Drive method	1/3 DUTY 1/2 BIAS			
Polarizer type	T/R	Operating Temp	-20°C~70°C	No. YDDC3391ABTDRPN	VER.1	CHK
Viewing Angle	6:00	Storage Temp	-30°C~80°C	.X	±0.1	Size: A4
Connector	Pin	Customer No.		.XX	±0.05	Unit: mm
						Scale: Free
						APV

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
COM1	COM1				COM1	B1	A1	F1	B2	A2	F2	B3	A3	F3	
COM2		COM2			COM2	C1	G1	E1	C2	G2	E2	C3	G3	E3	
COM3			COM3	COM3		P1	D1	H1	P2	D2	H2	P3	D3	H3	
PIN	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
COM1	B4	A4	F4	B5	A5	F5	B6	A6	F6	B7	A7	F7	B8	A8	F8
COM2	C4	G4	E4	C5	G5	E5	C6	G6	E6	C7	G7	E7	C8	G8	E8
COM3	P4	D4	H4	P5	D5	H5	P6	D6	H6	P7	D7	H7	P8	D8	H8

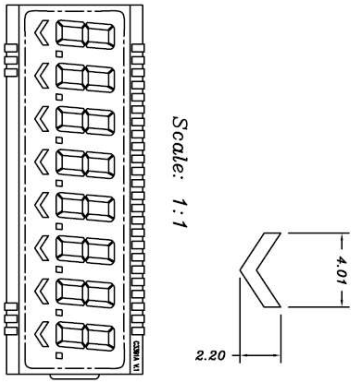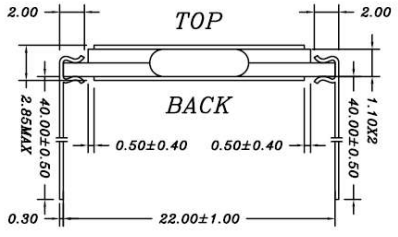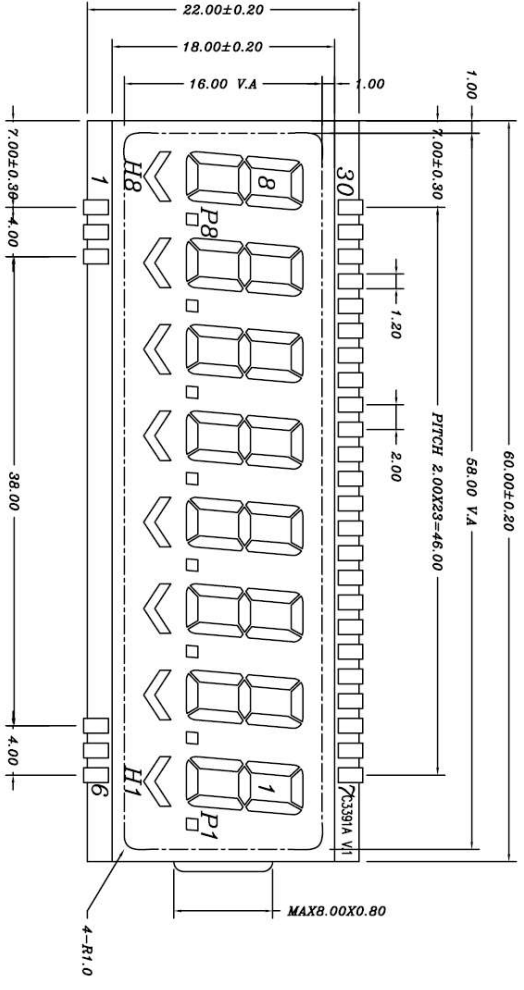

NO	REVISION RECORD	NAME	DATE
1.	Initial version	Mu Xiang	2010.11.17
2.			
3.			

DATE	January 29, 2013	Version	1.0	Technical Specification
LCD	YES	YDDC3391ABTDRPN	Page 11 of 11	