

Features

Ultra-slim 1 Pole - 6 A relay


Printed circuit mount

- direct or via PCB socket

35 mm rail mount

- via screw or screwless sockets

- 1 Pole changeover contacts or 1 Pole normally open contact
- Ultra slim, 5 mm, package
- Sensitive DC coil - 170 mW (Dual AC/DC coil drive possible using 93 series sockets)
- UL Listing (certain relay/socket combinations)
- Cadmium Free contact materials
- 8/8 mm clearance/creepage distance
- 6 kV (1.2/50 μ s) insulation, coil-contacts



FOR UL HORSEPOWER AND PILOT DUTY RATINGS
SEE "General technical information" page V

Contact specification

Contact configuration	1 CO (SPDT)
Rated current/Maximum peak current	A 6/10
Rated voltage/Maximum switching voltage V AC	250/400
Rated load AC1	VA 1,500
Rated load AC15 (230 V AC)	VA 300
Single phase motor rating (230 V AC)	kW 0.185
Breaking capacity DC1: 30/110/220 V	A 6/0.2/0.12
Minimum switching load	mW (V/mA) 500 (12/10)
Standard contact material	AgNi

Coil specification

Nominal voltage (U_N)	V AC (50/60 Hz)	—
	V DC	5 - 12 - 24 - 48 - 60
Rated power AC/DC	VA (50 Hz)/W	—/0.17
Operating range	AC	—
	DC	(0.7...1.5) U_N
Holding voltage	AC/DC	—/0.4 U_N
Must drop-out voltage	AC/DC	—/0.05 U_N

Technical data



Mechanical life AC/DC	cycles	—/10 · 10 ⁶
Electrical life at rated load AC1	cycles	60 · 10 ³
Operate/release time	ms	5/3
Insulation between coil and contacts (1.2/50 μ s)	kV	6 (8 mm)
Dielectric strength between open contacts V AC		1,000
Ambient temperature range	°C	−40...+85
Environmental protection		RT II

Approvals (according to type)

34.51



- 5 mm wide
- Low coil power
- PCB or 93 series sockets



Copper side view

Features

Ultra-slim - Solid State Relays


Printed circuit mount

- direct or via PCB socket

35 mm rail mount

- via screw or screwless sockets



- Single circuit output switching options
 - 2 A 24 V DC
 - 0.1 A 48 V DC
 - 2 A 240 V AC
- Silent, high speed switching with long electrical life
- Ultra slim, 5 mm, package
- Sensitive DC Input circuits (Dual AC/DC input drive possible using 93 series sockets)
- UL Listing (certain relay/socket combinations)
- Wash tight: RT III
- 2,500 V insulation, input-output



34.81-9024



- 2 A, 24 V DC output switching
- PCB or 93 series sockets





Copper side view

34.81-7048



- 0.1 A, 48 V DC output switching
- PCB or 93 series sockets





Copper side view

34.81-8240



- 2 A, 240 V AC output switching
- Zero crossing switching
- PCB or 93 series sockets



Copper side view

Output circuit										
Contact configuration		1 NO (SPST-NO)			1 NO (SPST-NO)			1 NO (SPST-NO)		
Rated current/Maximum peak current (10 ms) A		2/20			0.1/0.5			2/40		
Rated voltage/Maximum blocking voltage V		(24/33)DC			(48/60)DC			(240/275)AC		
Switching voltage range V		(1.5...24)DC			(1.5...48)DC			(12...240)AC		
Minimum switching current mA		1			0.05			22		
Max. "OFF-state" leakage current mA		0.001			0.001			1.5		
Max. "ON-state" voltage drop V		0.12			1			1.6		
Input circuit										
Nominal voltage V DC		5	24	60	24	60		5	24	60
Rated power AC/DC W		0.035	0.17	0.18	0.17	0.18		0.060	0.17	0.18
Operating range V DC		3.5...12	16...30	35...72	16...30	35...72		3.5...10	16...30	35...72
Control current mA		7	7	3	7	3		12	7	3
Release voltage V DC		1	10	20	10	20		1	10	20
Impedance Ω		715	3,200	21,300	3,200	21,300		416	3,200	21,300
Technical data										
Operate/release time ms		0.1/0.6*			0.04/0.6*			12/12*		
Dielectric strength between input/output V		2,500			2,500			2,500		
Ambient temperature range °C		-20...+60			-20...+60			-20...+60		
Environmental protection		RT III			RT III			RT III		
Approvals (according to type)										

* Note: all technical data relates to using the relay directly on PCB or PCB socket type 93.11.
If the relay is use with 35 mm rail socket types 93.01, 93.21 or 93.51, refer to the technical data of 38 Series.

Ordering information

Electromechanical relay (EMR)

Example: 34 series slim electromechanical relay, 1 CO (SPDT) 6 A contacts, 24 V sensitive DC coil.

3	4	.	5	1	.	7	.	0	2	4	.	A	0	B	0	C	1	D	0
----------	----------	---	----------	----------	---	----------	---	----------	----------	----------	---	----------	----------	----------	----------	----------	----------	----------	----------

Series _____
Type _____
 5 = Electromechanical type
No. of poles _____
 1 = 1 pole, 6 A
Coil version _____
 7 = Sensitive DC
Coil voltage _____
 See coil specifications

A: Contact material
 0 = Standard AgNi
 4 = AgSnO₂
 5 = AgNi + Au (5 µm)
B: Contact circuit
 0 = CO (SPDT)
 3 = NO (SPST)

C: Options
 1 = None
D: Special versions
 0 = Flux proof (RT II)
 9 = Flat version

Selecting features and options: only combinations in the same row are possible.
 Preferred selections for best availability are shown in **bold**.

Type	Coil version	A	B	C	D
34.51	sens. DC	0 - 4 - 5	0 - 3	1	0
34.51	sens. DC	0 - 4 - 5	0	1	9

Solid state relay (SSR)

Example: 34 series SSR relay, 2 A output, 24 V DC supply.

3	4	.	8	1	.	7	.	0	2	4	.	9	0	2	4
----------	----------	---	----------	----------	---	----------	---	----------	----------	----------	---	----------	----------	----------	----------



Series _____
Type _____
 8 = SSR type
Output _____
 1 = 1 NO (SPST-NO)
Input circuit _____
 See input specifications

Output circuit
 9024 = 2 A - 24 V DC
 7048 = 0.1 A - 48 V DC
 8240 = 2 A - 240 V AC

Flat pack version



Option = 34.51.7xxx.x019



Copper side view


Electromechanical relay

Technical data


Insulation according to EN 61810-1					
Nominal voltage of supply system	V AC	230/400			
Rated insulation voltage	V AC	250		400	
Pollution degree		3		2	
Insulation between coil and contact set					
Type of insulation		Reinforced			
Overvoltage category		III			
Rated impulse voltage	kV (1.2/50 μ s)	6			
Dielectric strength	V AC	4,000			
Insulation between open contacts					
Type of disconnection		Micro-disconnection			
Dielectric strength	V AC/kV (1.2/50 μ s)	1,000/1.5			
Conducted disturbance immunity					
Burst (5...50)ns, 5 kHz, on A1 - A2		EN 61000-4-4		level 4 (4 kV)	
Surge (1.2/50 μ s) on A1 - A2 (differential mode)		EN 61000-4-5		level 3 (2 kV)	
Other data					
Bounce time: NO/NC	ms	1/6			
Vibration resistance (5...55)Hz: NO/NC	g	10/5			
Shock resistance	g	20/14			
Power lost to the environment	without contact current	W	0.2		
	with rated current	W	0.5		
Recommended distance between relays mounted on PCB	mm	≥ 5			

Contact specification

F 34 - Electrical life (AC) v contact current

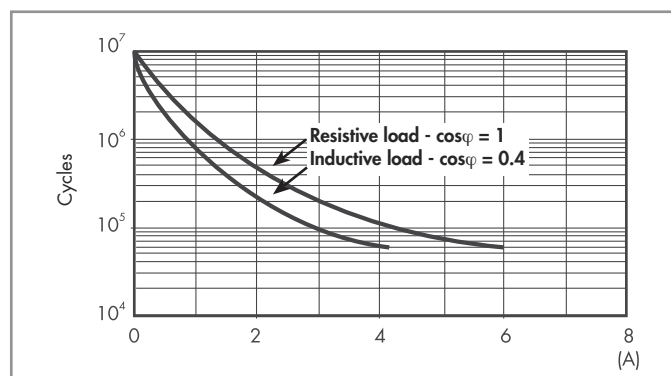

H 34 - Maximum DC1 breaking capacity

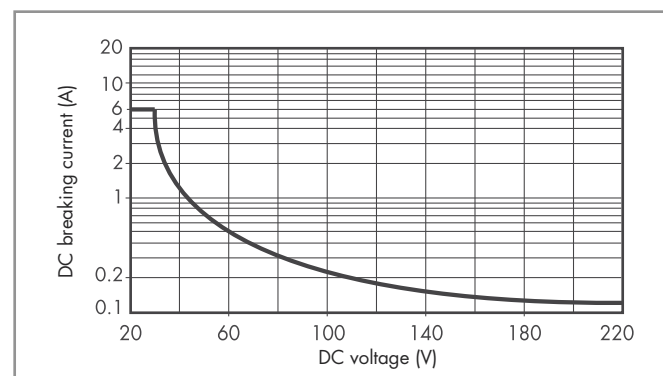


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 60 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load. Note: the release time for the load will be increased.

Coil specifications

DC coil data

Nominal voltage U_N V	Coil code	Operating range		Resistance R Ω	Rated coil consumption I at U_N mA
		U_{min} V	U_{max} V		
5	7.005	3.5	7.5	130	38.4
12	7.012	8.4	18	840	14.2
24	7.024	16.8	36	3,350	7.1
48	7.048	33.6	72	12,300	3.9
60	7.060	42	90	19,700	3

R 34 - DC coil operating range v ambient temperature

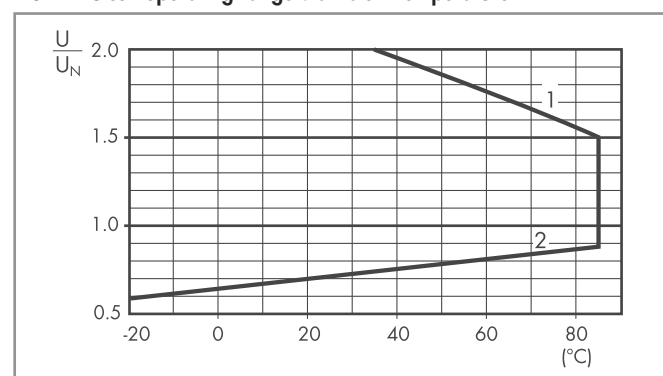

- 1 - Max. permitted coil voltage.
- 2 - Min. pick-up voltage with coil at ambient temperature.

Solid state relay

Technical data

Other data

Power lost to the environment	without output current	W	0.17
	with rated current	W	0.4

Input specification


Input data - DC types

Nominal voltage U_N	Input code	Operating range		Release voltage V	Impedance Ω	Control current I at U_N mA
		U_{min} V	U_{max} V			
5	7.005	3.5	12 (10*)	1	715 (416*)	7 (12*)
24	7.024	16	30	10	3,200	7
60	7.060	35	72	20	21,300	3

* AC Output version.

Output specification

L 34 - Output current v ambient temperature SSR - 2 A DC & AC output types

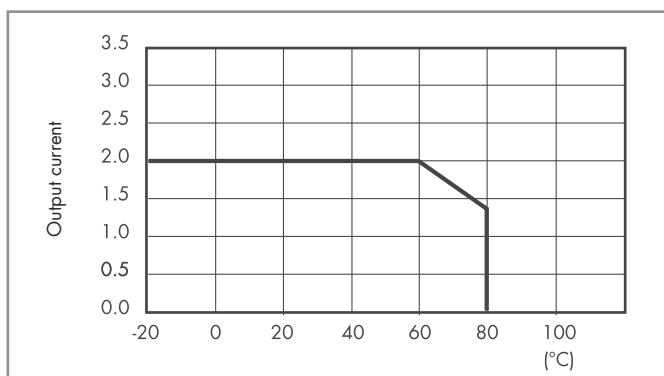

L 34 - Output current v ambient temperature SSR - 0.1 A DC output types

