


REF. TABLE 2

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 TERMINAL: PHOSPHOR BRANZE, GOLD PLATED 15u"

SPECIFICATION

CURRENT RATING: 1.0 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 40m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40C+85C
 DURABILITY: MATING AND UNMATING FORCE TESTER 5000 CYCLES(min)

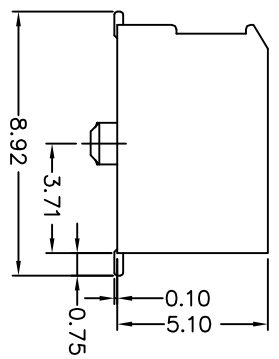

PART NUMBER

81BBH - * * * * 1 * O L
 SERIES -
 NO. OF POS. REF. TABLE 1
 CONTACT PLATED OPTION

LEAD FREE
 TOP VIEW ±0.05
 PACKAGE OPTION
 2: TAPE REEL
 3: TUBE

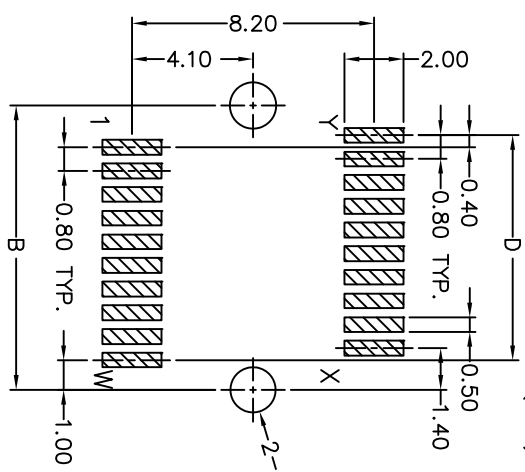


TABLE 1

NO. POS.	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
20	11.00	9.60	9.40	7.60	3.80
30	15.00	13.60	13.40	11.60	5.80
70	31.00	29.60	29.40	27.60	14.80

TABLE 2

NO. POS.	W	X	Y
20	10	11	20
30	15	16	30
70	35	36	70

SFP CONNECTOR SERIES

ZK-TEK
 ZK-TEK TECHNOLOGIES CO., LTD.
 Web Site: <http://zk-tel.com>

LINEAR: X&E0.30 X&E0.20 XXX&F0.10
 ANGLES: ±3°

DRAWN: *Stevn*
 CHECKED: *Eric*
 APPROVED: *JAMES*

TITLE: SFP CONN., PCB MOUNT, SMT, WITH POST

SIZE: A4
 VERSION: C
 DWG NO.: 81BB-001

SCALE: NONE
 UNIT: MM
 SHEET: 1 OF 1

ADD DIMENSION

ADD PLATING OPTION

RELEASE

DESCRIPTION

DATE

REV. A

REV. B

REV. C

2013.11.26

2008.11.20

2008.11.19

1

1

2

3

4