




Стяжка 100x2,5мм с защитой от УФ, черная, упаков. 100 шт.



### Схема изделия

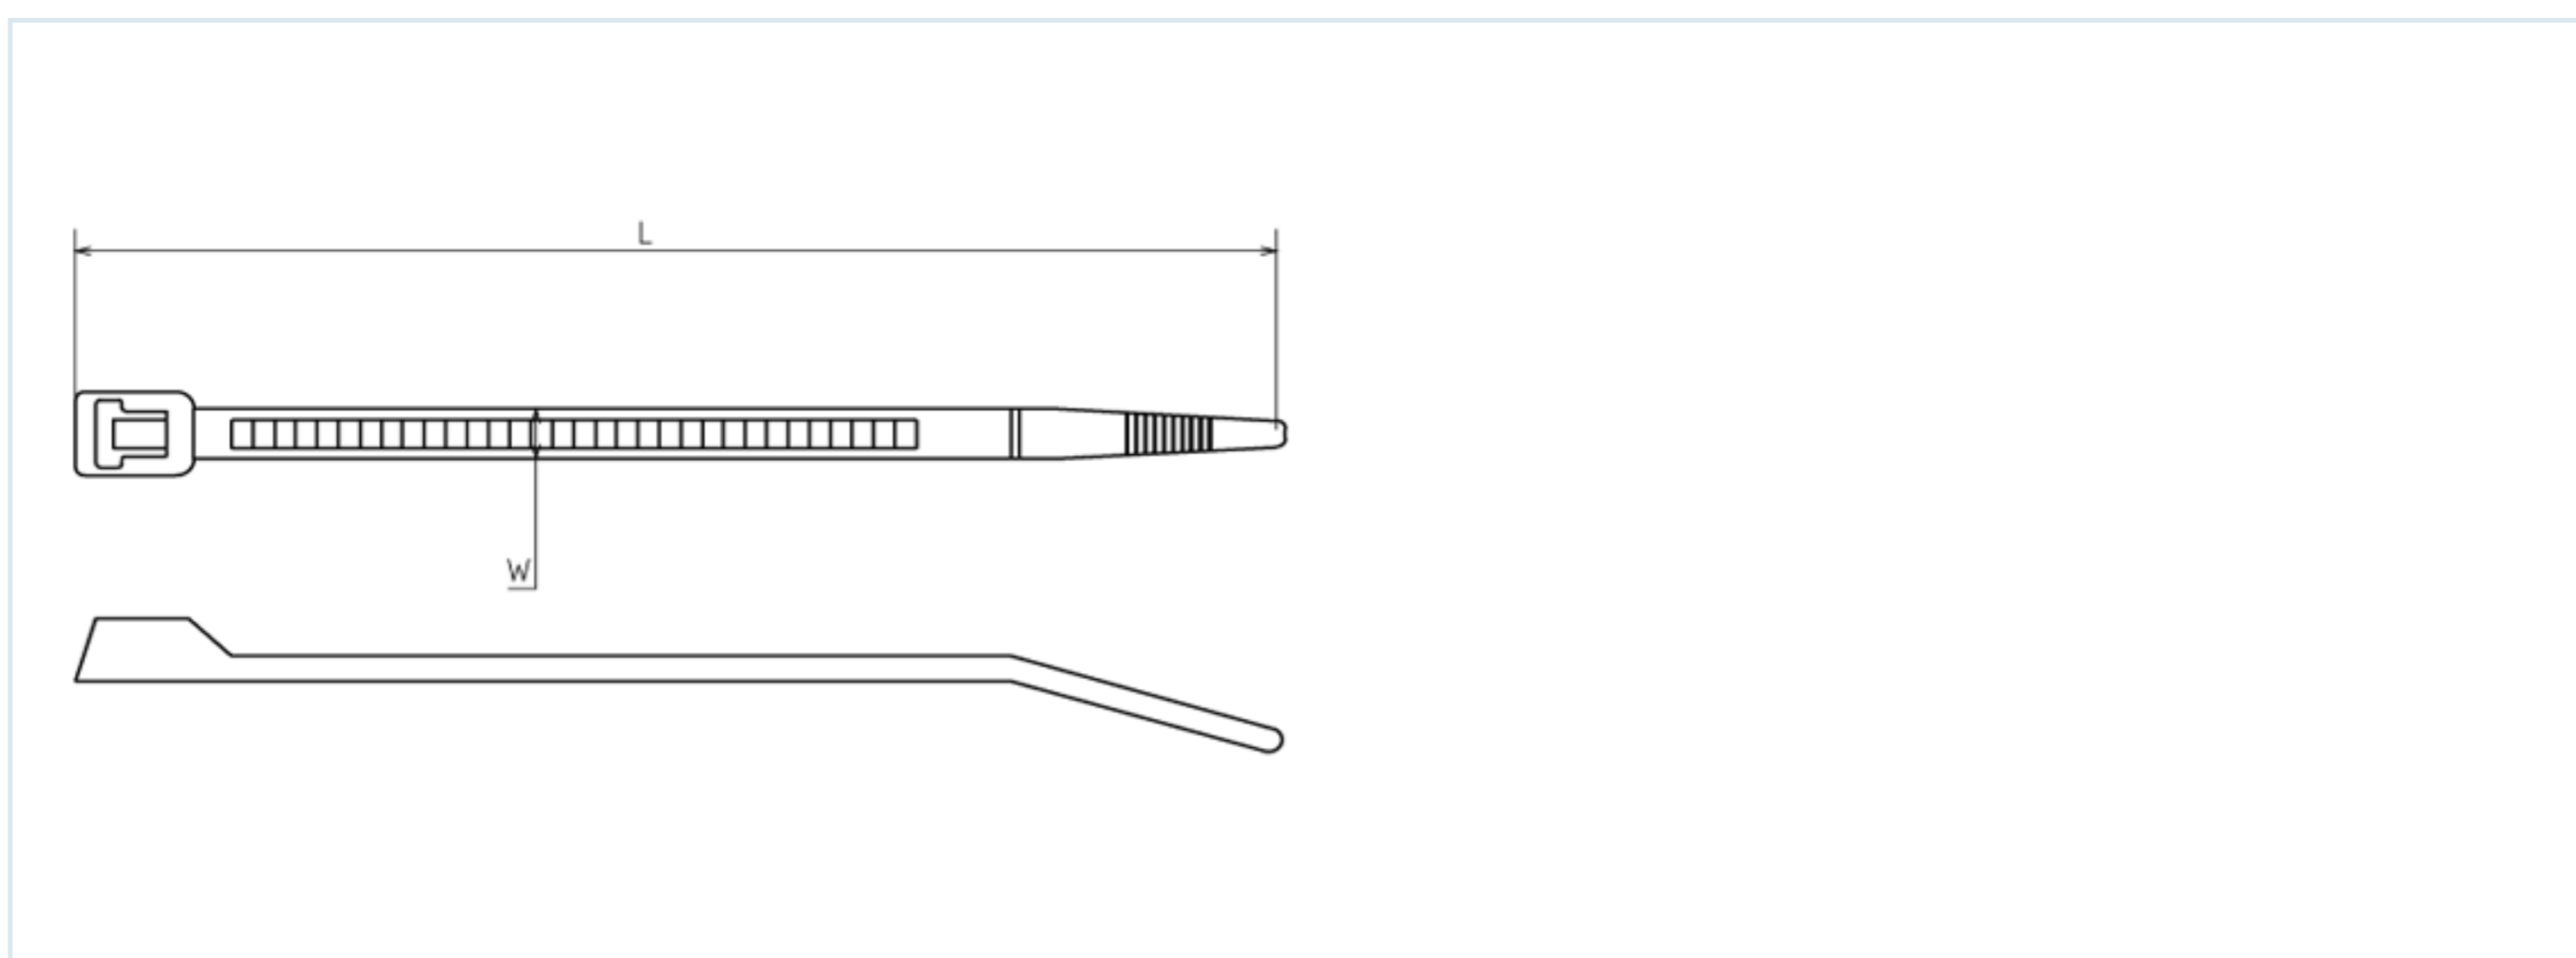

### Описание изделия

Артикул	Длина L, мм	Ширина W, мм	Диаметр обхвата, мм	Усилие на разрыв, кг
CVT-070W	71	1.6	11	3
CV-060W	63.7	2.4	11	8
CV-075W	75	2.4	15	8
CV-080W	80	2.5	16	8
CV-094W	96	2.5	21	8
CV-100W	100	2.5	22	8
CVT-100W	103	1.95	22	8
CV-120SW	120	2.5	28	8
CV-140SW	142	2.5	35	8
CV-150SW	155	2.5	39	8
CV-165W	165	2.5	43	8
CV-200MW	203	2.5	55	8
CV-250SW	250	2.5	68	8

CV-300MW	300	2.5	80	8
CV-400SW	400	2.5	116	8
CV-120W	120	3.2	28	18
CV-140W	142	3.2	34	18
CV-150W	150	3.6	36	18
CV-180W	180	3.6	46	18
CV-180TW	180	3.6	46	18
CV-200SW	203	3.2	53	18
CV-200AW	203	3.6	52	18
CV-250MW	250	3.6	68	18
CV-265W	265	3.6	73	18
CV-292W	292	3.6	82	18
CV-330W	330	3.6	93	18
CV-368SW	368	3.6	105	18
CV-120LW	120	4.8	27	22
CV-160LW	160	4.8	39	22
CV-190W	190	4.8	49	22
CV-200W	190	4.8	49	22
CV-200W	203	4.6	52	22
CV-200DW	203	4.8	52	22
CV-200TW	203	4.8	52	22
CV-250W	250	4.8	68	22
CV-280W	280	4.8	77	22
CV-300SW	300	4.8	83	22
CV-310W	310	4.8	86	22
CV-350W	350	4.6	98	22
CV-368W	368	4.8	105	22
CV-385W	385	4.8	110	22
CV-400W	400	4.6	116	22
CV-432W	432	4.8	125	22
CV-450MW	450	4.8	131	22
CV-500W	500	4.8	147	22
CV-550SW	550	4.8	162	22
CV-610SW	610	4.8	181	22
CV-635SW	635	4.8	189	22
CV-730SW	730	4.8	219	22
CV-914SW	914	4.8	278	22
CV-200ZW	200	4.6	48	34

CV-280ZW	280	4.8	70	34
CV-300SZW	300	4.8	74	34
CV-368ZW	368	4.8	94	34
CV-300STZW	300	4.8	83	36
CV-380SW	380	6.4	108	45
CV-120LLW	120	7.6	22	55
CV-150LW	150	7.6	32	55
CV-200LW	203	7.6	52	55
CV-240LW	240	7.6	61	55
CV-250LW	250	7.6	64	55
CV-280LW	280	7.6	74	55
CV-300W	300	7.6	80	55
CV-340W	340	7.6	92	55
CV-360W	360	7.6	99	55
CV-370W	370	7.6	101	55
CV-380W	380	7.6	105	55
CV-380LW	380	8	105	55
CV-450W	450	8	128	55
CV-500LW	500	8	143	55
CV-550W	550	8	160	55
CV-610MW	610	7.6	177	55
CV-750W	750	7.5	223	55
CV-450LW	450	9	128	80
CV-550DW	550	9	160	80
CV-610W	610	9	177	80
CV-685W	685	9	202	80
CV-710W	710	9	209	80
CV-762W	762	9	227	80
CV-812W	812	9	243	80
CV-914W	914	9	275	80
CV-940W	940	9	284	80
CV-1168W	1168	9	356	80
CV-1219W	1219	9	372	80
CV-1500W	1500	9	462	80

**Материал продукта:** нейлон 66 устойчивый к УФ излучению с добавлением стабилизатора (карбона)

**Рабочая температура:** 0° С +85° С

**Цвет:** чёрный

**Примечание:** устойчивая к ультрафиолету.