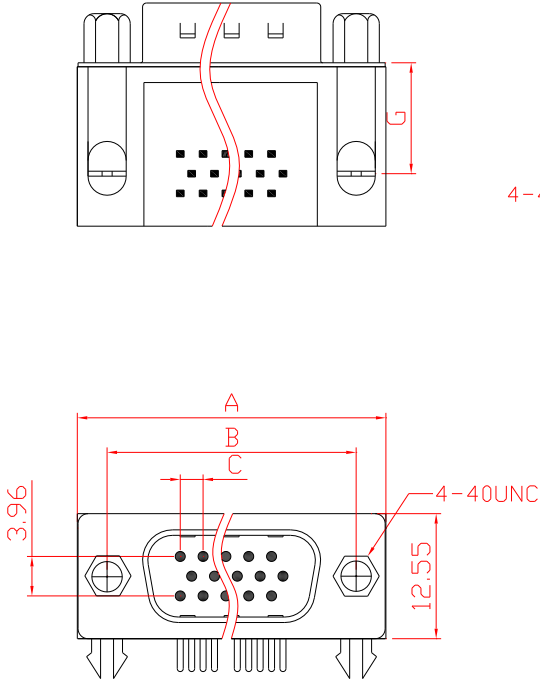
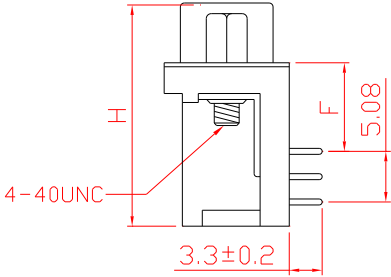
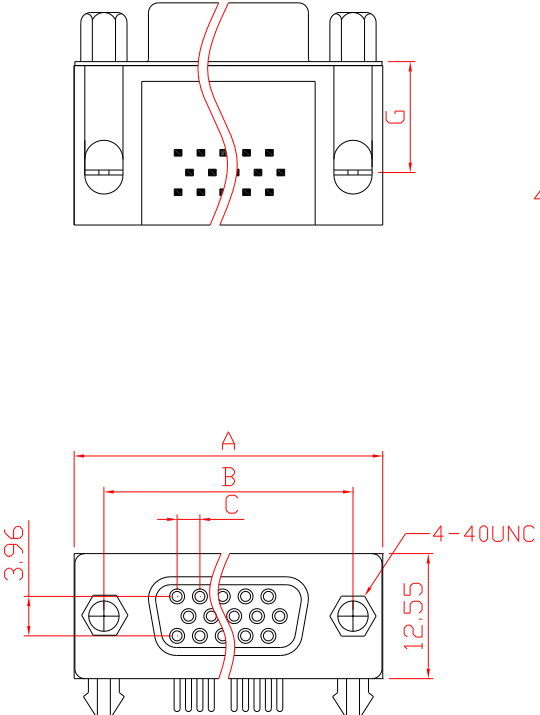
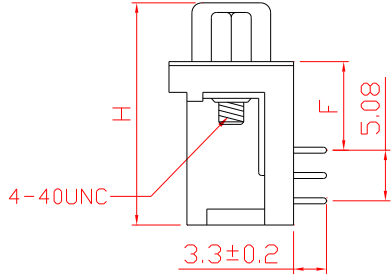


序号/RevNo.				名称/Title				文件编号/File No.																																
  Specifications: Contact Resistance: 30mΩ max.at DC 100 mA Insulator Resistance: 1000MΩ min.at DC 500V Current Rating: 3AMP Dielectric Withstanding Voltage: AC 1000V For 1 minute Operating Temperature:-55℃--+105℃ Contact: Phosphor bronze Housing: PBT &30% Glass Fiber(UL 94V-0) <table><tr><th>Position</th><th>A</th><th>B</th><th>C</th></tr><tr><td>15</td><td>31.04</td><td>24.99</td><td>2.29</td></tr><tr><td>26</td><td>39.24</td><td>33.32</td><td>2.29</td></tr><tr><td>44</td><td>53.04</td><td>47.04</td><td>2.29</td></tr><tr><td>62</td><td>69.62</td><td>63.50</td><td>2.41</td></tr></table><table><tr><th>F</th><th>G</th><th>H</th></tr><tr><td>3.08</td><td>5.08</td><td>14.45</td></tr><tr><td>8.89</td><td>10.89</td><td>22.2</td></tr></table>												Position	A	B	C	15	31.04	24.99	2.29	26	39.24	33.32	2.29	44	53.04	47.04	2.29	62	69.62	63.50	2.41	F	G	H	3.08	5.08	14.45	8.89	10.89	22.2
Position	A	B	C																																					
15	31.04	24.99	2.29																																					
26	39.24	33.32	2.29																																					
44	53.04	47.04	2.29																																					
62	69.62	63.50	2.41																																					
F	G	H																																						
3.08	5.08	14.45																																						
8.89	10.89	22.2																																						
设计/Designed by				绘图/Drawing by				审核/Checked by				批准/Approved by				未注公差 General Tolerance																								
								图名/Title				文件编号/File No.				x. ±0.2 x.' ±2'																								
								108M产品图				QJ/XYT-12015				.x ±0.1 .x' ±1'																								
												页序/Sheet				.xx ±0.05 .xx' ±0.5'																								
								备注 /Remark								.xxx ±0.01																								
																单位/units: mm																								
序号/RevNo.				更改记录/Revision note				签名/Signature				日期/Date																												

序号/RevNo.				名称/Title				文件编号/File No.																																
  Specifications: Contact Resistance: 30mΩ max.at DC 100 mA Insulator Resistance: 1000MΩ min.at DC 500V Current Rating: 3AMP Dielectric Withstanding Voltage: AC 1000V For 1 minute Operating Temperature:-55℃--+105℃ Contact: Phosphor bronze Housing: PBT &30% Glass Fiber(UL 94V-0) <table><tr><th>Position</th><th>A</th><th>B</th><th>C</th></tr><tr><td>15</td><td>31.04</td><td>24.99</td><td>2.29</td></tr><tr><td>26</td><td>39.24</td><td>33.32</td><td>2.29</td></tr><tr><td>44</td><td>53.04</td><td>47.04</td><td>2.29</td></tr><tr><td>62</td><td>69.62</td><td>63.50</td><td>2.41</td></tr></table><table><tr><th>F</th><th>G</th><th>H</th></tr><tr><td>3.08</td><td>5.08</td><td>14.45</td></tr><tr><td>8.89</td><td>10.89</td><td>22.2</td></tr></table>												Position	A	B	C	15	31.04	24.99	2.29	26	39.24	33.32	2.29	44	53.04	47.04	2.29	62	69.62	63.50	2.41	F	G	H	3.08	5.08	14.45	8.89	10.89	22.2
Position	A	B	C																																					
15	31.04	24.99	2.29																																					
26	39.24	33.32	2.29																																					
44	53.04	47.04	2.29																																					
62	69.62	63.50	2.41																																					
F	G	H																																						
3.08	5.08	14.45																																						
8.89	10.89	22.2																																						
设计/Designed by				绘图/Drawing by				审核/Checked by				批准/Approved by				未注公差 General Tolerance																								
												图名/Title				文件编号/File No.				x. ±0.2 x.' ±2'																				
												108F产品图				QJ/XYT-12016				.x ±0.1 .x' ±1'																				
																.xx ±0.05 .xx' ±0.5'																								
								备注 /Remark								.xxx ±0.01																								
																单位/units: mm																								
序号/RevNo.				更改记录/Revision note				签名/Signature				日期/Date																												