


NON-INSULATED RING TERMINALS 圓型裸端子

TERMINAL MATERIAL : COPPER

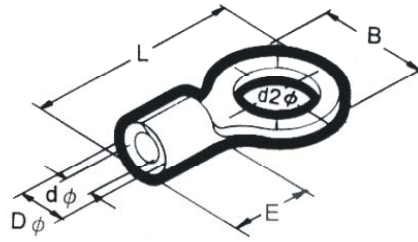

ITEM NO.	DIMENSIONS							WIRE RANGE		
	d2φ	B	L	E	Dφ	dφ	Single mm	Twine mm	AWG	
1.25	1.25-3A	3.2	5.5	11.5	4.5	3.4	1.7	0.57 1.44	0.25 1.65	22~16
	1.25-3	3.7	5.5	11.5	4.5	3.4	1.7			
	1.25-3M	3.7	6.6	14.4	4.5	3.4	1.7			
	1.25-4	4.3	8.0	15.8	4.5	3.4	1.7			
	1.25-4M	4.3	6.6	14.4	4.5	3.4	1.7			
	1.25-5	5.3	8.0	15.8	4.5	3.4	1.7			
	1.25-6	6.4	11.6	21.7	4.5	3.4	1.7			
	1.25-8	8.4	11.6	21.7	4.5	3.4	1.7			
	1.25-10	10.5	13.6	26.0	4.5	3.4	1.7			
	2-3A	3.2	8.5	16.8	4.8	4.0	2.3			
2-3	3.7	8.5	16.8	4.8	4.0	2.3				
2-3M	3.7	6.6	14.4	4.8	4.0	2.3				
2-4	4.3	8.5	16.8	4.8	4.0	2.3				
2-4M	4.3	6.6	14.4	4.8	4.0	2.3				
2-5	5.3	9.5	16.8	4.8	4.0	2.3				
2-6	6.4	12.0	21.8	4.8	4.0	2.3				
2-8	8.4	12.0	21.8	4.8	4.0	2.3				
2-10	10.5	13.6	25.5	4.8	4.0	2.3				
3.5-4M	4.3	8.4	20.0	6.8	5.0	3.2	1.82 2.4	2.63 4.6	12~10	
3.5-5M	5.3	8.4	20.0	6.8	5.0	3.2				
5.5-3	3.7	9.5	19.8	6.8	5.6	3.5	1.82 2.89	2.63 6.64	12~10	
5.5-4	4.3	9.5	19.8	6.8	5.6	3.5				
5.5-5	5.3	9.5	19.8	6.8	5.6	3.5				
5.5-6	6.4	12.0	25.8	6.8	5.6	3.5				
5.5-8	8.4	15.0	28.0	6.8	5.6	3.5				
5.5-10	10.5	15.0	28.0	6.8	5.6	3.5				
8-3	3.7	14.0	27.0	8.0	7.0	4.5	2.89 3.65	6.64 10.52	8	
8-5	5.3	11.0	21.0	8.0	7.0	4.5				
8-6	6.4	11.0	22.5	8.0	7.0	4.5				
8-8	8.4	15.0	27.0	8.0	7.0	4.5				
8-10	10.5	15.0	30.0	8.0	7.0	4.5				
14-4	4.3	11.1	25.4	10.1	8.5	6.4	3.65 4.62	10.52 16.78	6	
14-5	5.3	11.1	25.4	10.1	8.5	6.4				
14-6	6.4	11.0	25.4	10.1	8.5	6.4				
14-8	8.4	14.0	31.0	10.1	8.5	6.4				
14-10	10.5	18.0	33.0	10.1	8.5	6.4				
14-12	13.0	19.2	33.8	10.1	8.5	6.4				

ITEM NO.	DIMENSIONS							WIRE RANGE		
	d2φ	B	L	E	Dφ	dφ	Single mm	Twine mm	AWG	
22	22-3	3.7	16.1	32.8	11.0	10.7	8.3	4.62 5.81	16.78 26.66	4
	22-4	4.3	7.5	27	11.2	10.7	8.3			
	22-5	5.3	12.0	30.7	11.0	10.7	8.3			
	22-6S	6.4	12	31	11.2	10.7	8.3			
	22-8S	8.4	12.7	33	12.6	10.7	8.3			
	22-8	8.4	16.5	33.5	12	10.1	7.6			
	22-10S	10.5	16.0	32.7	12	10.7	8.3			
	22-10	10.5	16.5	33.5	12	10.1	7.6			
	22-12	13.0	22.0	41.4	11.2	10.7	8.3			
	30-8	8.4	15.0	33.1	12.7	11.0	8.4			
30-10	10.5	16.5	33.7	12.3	10.6	8.0				
38-6	6.4	16	37	14	12	9.4	5.81 7.34	26.66 42.43	2	
38-8	8.4	16	37	14	12	9.4				
38-10	10.5	16	37	14	12	9.4				
38-12	13	20	39	14	12	9.4				
50-8	8.4	19	42	16	14	10.8	6.64 8.13	38.5 59.7	1	
50-10	10.5	19	42	16	14	10.8				
50-12	13	19	42	16	14	10.8				
60-8	8.4	22	44	17	15.3	11.9	7.34 8.26	42.42 60.57	1/0	
60-10	10.5	22	44	17	15.3	11.9				
60-12	13	22	44	17	15.3	11.9				
70-10	10.5	23	46	18	17	13.6	8.26 9.27	60.57 76.28	2/0	
70-12	13	23	46	18	17	13.6				
80-8	8.4	24	47	19	19	14.6	9.27 10.41	76.28 96.3	3/0	
80-10	10.5	24	47	19	19	14.6				
80-12	13	24	47	19	19	14.6				
100-8	8.4	25.6	52	21	21	16.6	10.41 11.68	96.3 117.2	4/0	
100-10	10.5	25.6	52	21	21	16.6				
100-12	13	25.6	52	21	21	16.6				
150-10	10.5	34	63	27	25.6	20	11.68 13.8	117.2 152.05	250-300 MCM	
150-12	13	34	63	27	25.6	20				
150-16	17	34	63	27	25.6	20				
180-12	13	36	66	28	27.2	21.6	13.8 15.6	152.05 192.6	300-350 MCM	
180-16	17	36	66	28	27.2	21.6				
200-10	10.5	40	71	30.5	31.3	24.5	15.6 17.5	192.6 242.27	400 MCM	
200-12	13	40	71	30.5	31.3	24.5				
200-16	17	40	71	30.5	31.3	24.5				
325-12	13	40	85	34	35.8	28.4	17.5 20.3	242.27 325	500-600 MCM	
325-16	17	40	85	34	35.8	28.4				