
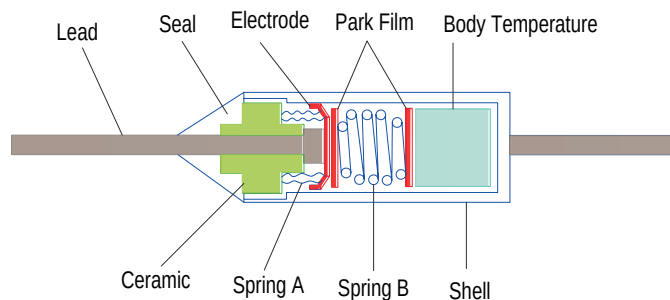


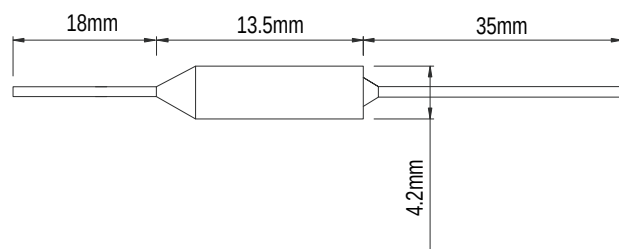

ELECTRICAL:

1. Rate Voltage / Current: 250V / 10A
2. Normal Electric Strength: Between Housing (Cover the silicone insulation Tube) and Lead, Dielectric Strength should be AC 50hz, 1500V, Last 1 mins without Blink and Breakdown.
3. Insulation Resistance: Between housing (Cover the silicone insulation Tube and Lead Insulation Resistance $> 2\text{M}\Omega$
4. Contact Insulation between Lead $\leq 0.028\Omega$
5. Disconnecton Insulation Resistance: Lead to lead in disconnection, Insulation Resistance $\geq 0.2\text{M}\Omega$
6. Leadkage Current: $\leq 0.2\text{mA}$

How to Order:

RY- 250V- 10A (TF XX)

Rated Function Temperature

Available Temperature Range 55 to 285.

YUHUI ELECTRONIC TECH. CO.,LTD.

GENERAL TOLERANCE

X: $\pm 5.0^\circ$	X. ± 0.30
.X: $\pm 3.0^\circ$	.X ± 0.25
.XX: $\pm 2.0^\circ$	.XX ± 0.15
.XXX: $\pm 1.0^\circ$	.XXX ± 0.10

DESIGN: 黄 语 惠

CHECK: 忠 诚

AUDIT: 忠 诚

APPROVE: 忠 诚

DATE: 2020.02.28

DATE: 2020.03.02

DATE: 2020.03.02

DATE: 2020.03.02

DWG. NO.:

YH-RY-250V-10A-001A-001

PART NO.:

RY-250V-10A(TF142)

TITLE:

250V/10A, Steel Type Thermal Fuse

REV.: 01	UNIT.: mm	SCALE.: 1:1	PAGE.: 1/1	
----------	-----------	-------------	------------	--