



REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

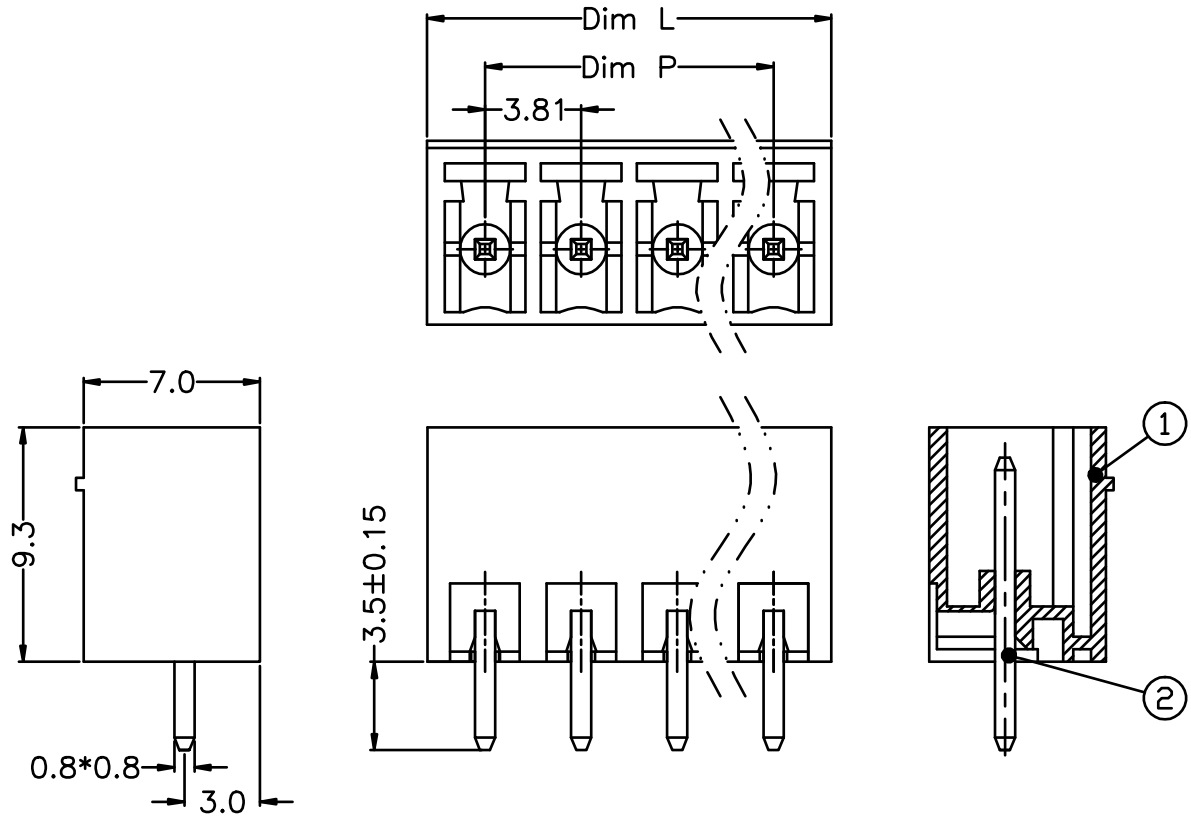


- Material
 - ØHousing : PA66, UL94V-0
 - ØPin header : Brass, Tin plated
- Electrical

	UL	IEC
Rated voltage :	300V	250V
Rated current :	8A	7A
Insulation resistance:	500MΩ/DC500V	
Withstanding Voltage :	AC1500V/1min	
- Mechanical
 - Operating temperature: -40℃~+105℃
 - Soldering temperature: 250℃±5/5sec

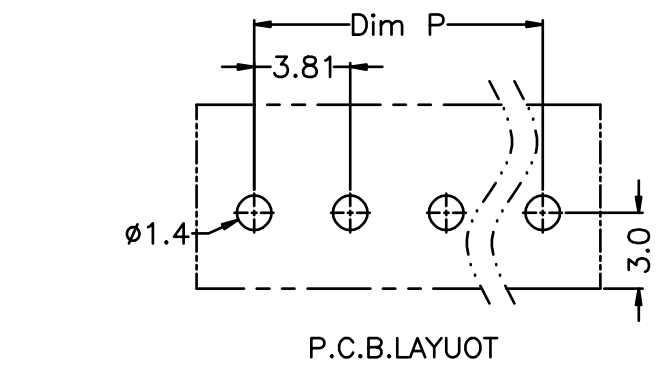

N=Number of Poles
 Dim P=(N-1)x3.81
 Dim L=Nx3.81+0.8

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

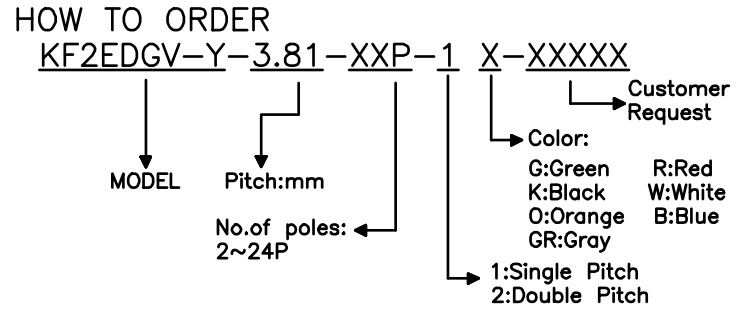

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X'.	±5'
.X	±0.3	.X'	±3'
.XX	±0.1	.XX'	±1'

PROJECTION	TITLE
mm	KF2EDGV-Y-3.81-XXP
UNITS	
A4	SERIES KF2EDGV-Y
SHEET SIZE	

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

DF 慈溪市凯峰电子有限公司
 KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD