


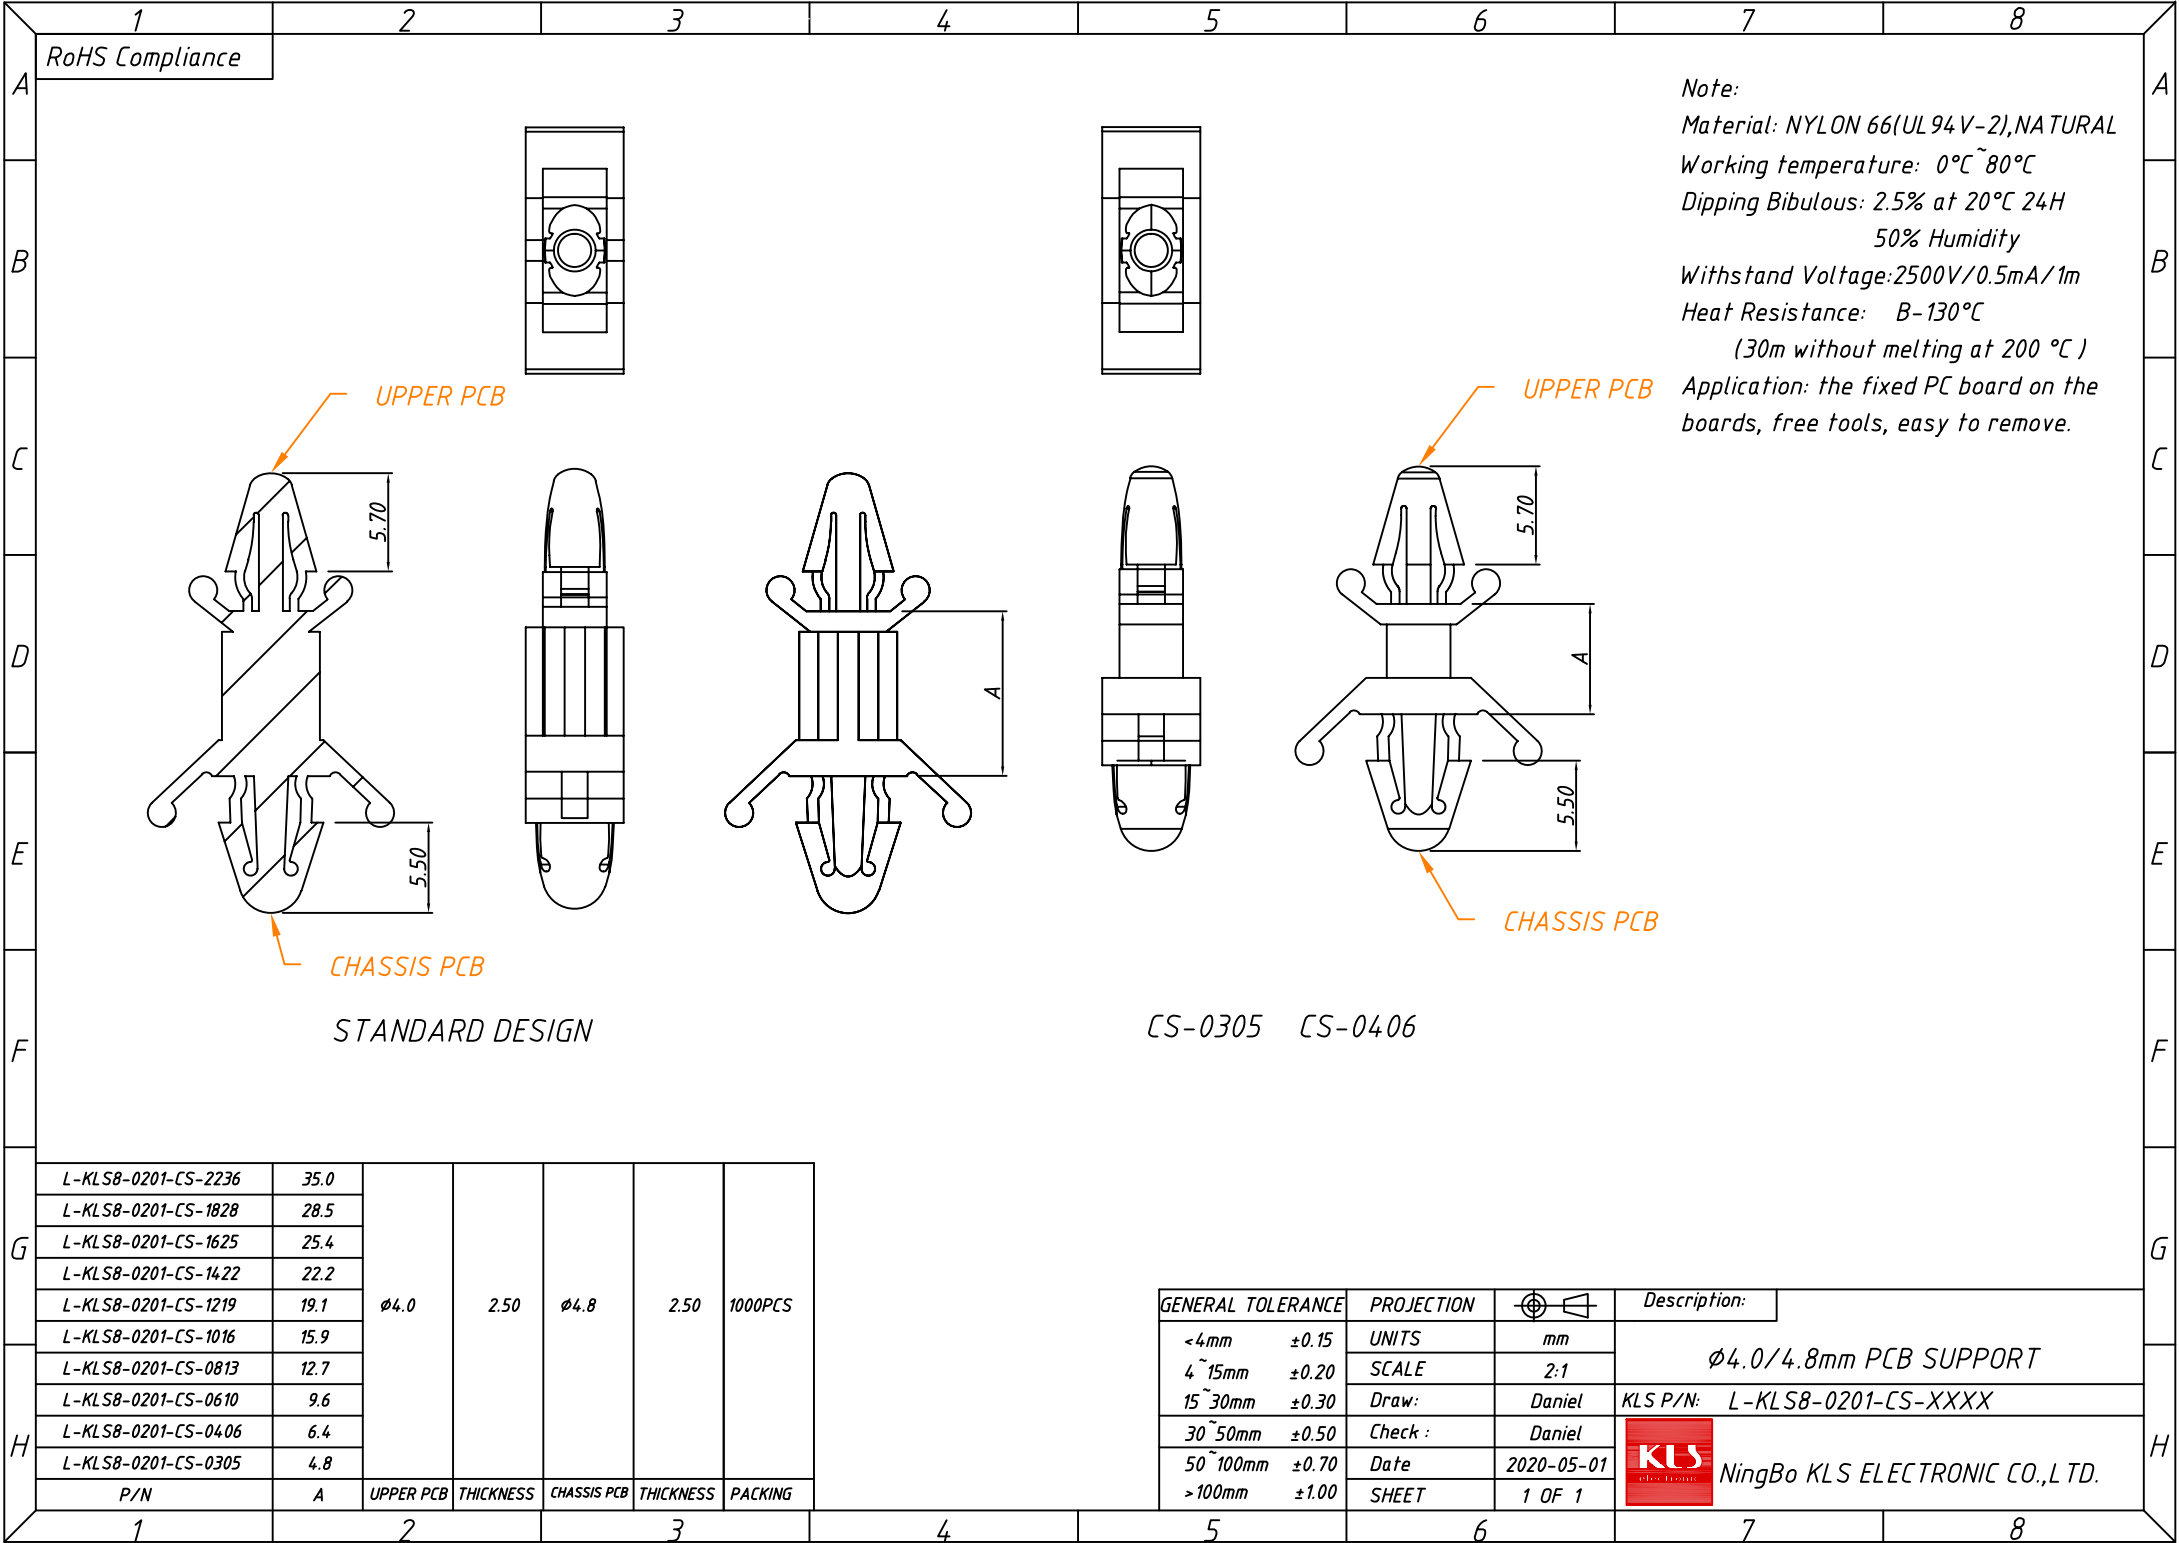

Note:
Material: NYLON 66(UL 94 V-2),NATURAL
Working temperature: 0℃~80℃
Dipping Bibulous: 2.5% at 20℃ 24H
50% Humidity
Withstand Voltage:2500V/0.5mA/1m
Heat Resistance: B-130℃
(30m without melting at 200 ℃)
Application: the fixed PC board on the boards, free tools, easy to remove.

L-KLS8-0201-CS-2236	35.0	ø4.0	2.50	ø4.8	2.50	1000PCS
L-KLS8-0201-CS-1828	28.5					
L-KLS8-0201-CS-1625	25.4					
L-KLS8-0201-CS-1422	22.2					
L-KLS8-0201-CS-1219	19.1					
L-KLS8-0201-CS-1016	15.9					
L-KLS8-0201-CS-0813	12.7					
L-KLS8-0201-CS-0610	9.6					
L-KLS8-0201-CS-0406	6.4	P/N	A	UPPER PCB	THICKNESS	CHASSIS PCB
L-KLS8-0201-CS-0305	4.8					
P/N	A	UPPER PCB	THICKNESS	CHASSIS PCB	THICKNESS	PACKING

GENERAL TOLERANCE		PROJECTION		Description:
<4mm	±0.15	UNITS	mm	ø4.0/4.8mm PCB SUPPORT
4~15mm	±0.20	SCALE	2:1	
15~30mm	±0.30	Draw:	Daniel	KLS P/N: L-KLS8-0201-CS-XXXX
30~50mm	±0.50	Check :	Daniel	
50~100mm	±0.70	Date	2020-05-01	NingBo KLS ELECTRONIC CO.,L TD.
>100mm	±1.00	SHEET	1 OF 1	