
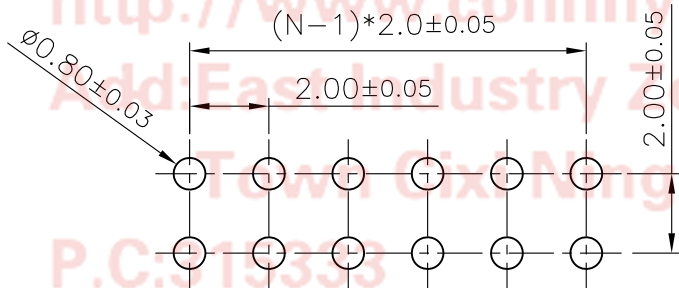
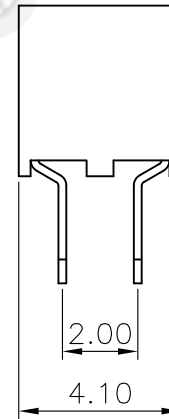
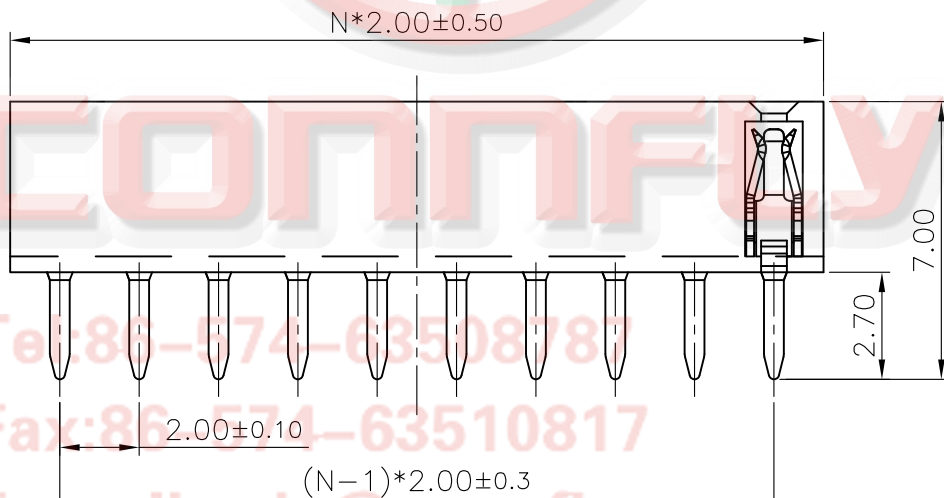



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/15/07'	~	LJC 10/15/07'
B	TERMINAL CHANGE	JLZ 08/04/14'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:  
 DS1026-06 - X X X X X  
 CONTACTS TYPE V:VERTICAL  
 HOUSING COLOR B:BLACK  
 CONTACT PLATING 8: FULL GOLD FLASH  
 CONNECTOR TYPE S:SOCKET  
 No.OF CONTACTS 2\*2-2\*40  
 SERIES No. DS1026-06

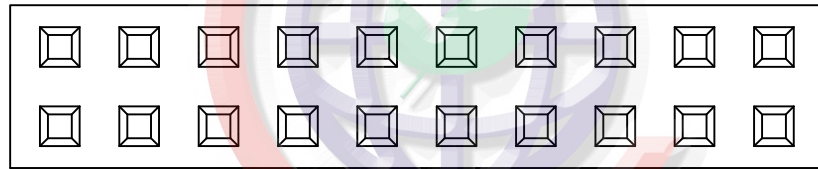

Recommend PCB layout

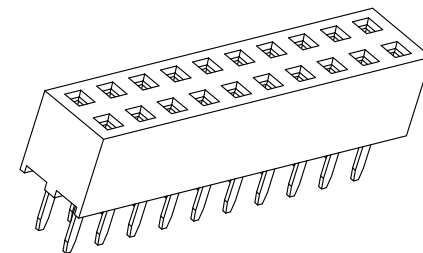

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	FEMALE HEADER PITCH 2.00mmTYPE
SHEET SIZE A4	SERIES DS1026-06 SERIES

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO. C-DS1026-06-XXXXX-B	

**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**