

PG加長型金屬電纜固定頭
PG-Length Metal Cable Glands




→ PG-Length




材料:	鍍鎳黃銅	Material:	Nickel-plated brass
固定連接組件:	採用UL認可的尼龍材料	Fixture pack:	PA (NYLON), UL 94 V-2
防水圈:	丁腈橡膠 (可選EPDM, 硅橡膠, TPV等)	Hermetic seal:	NBR (optional material EPDM, Silicone Rubber, TPV)
O型圈:	EPDM (可選硅橡膠, TPV, 氟橡膠等)	O-Ring:	EPDM (optional material, Silicone Rubber, TPV, FPM)
工作溫度:	-40°C至100°C	Working temperature:	-40°C to 100°C

如需其他材料, 請垂詢! Other material upon request.
O型圈默認預裝! All O rings are pre-assembled as standard.

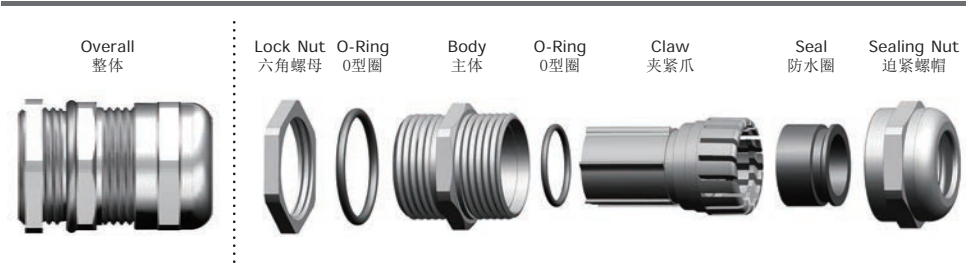

■ PROFILE



Thread ØD1	Øk mm	H mm	GL mm	H mm	Beisit No.	Article No.
PG 7	3-6,5	19	10	14	P0707BRL	1.110.0701.0300
PG 7	2-5	19	10	14	P0705BRL	1.110.0701.2300
PG 9	4-8	21	10	17	P0908BRL	1.110.0901.0300
PG 9	2-6	21	10	17	P0906BRL	1.110.0901.2300
PG 11	5-10	22	10	20	P1110BRL	1.110.1101.0300
PG 11	3-7	22	10	20	P1107BRL	1.110.1101.2300
PG 13,5	6-12	23	10	22	P13512BRL	1.110.1301.0300
PG 13,5	5-9	23	10	22	P13509BRL	1.110.1301.2300
PG 16	10-14	24	10	24	P1614BRL	1.110.1601.0300
PG 16	7-12	24	10	24	P1612BRL	1.110.1601.2300
PG 21	13-18	25	12	30	P2118BRL	1.110.2101.0300
PG 21	9-16	25	12	30	P2116BRL	1.110.2101.2300
PG 29	18-25	31	12	40	P2925BRL	1.110.2901.0300
PG 29	13-20	31	12	40	P2920BRL	1.110.2901.2300
PG 36	22-32	37	15	50	P3632BRL	1.110.3601.0300
PG 36	20-26	37	15	50	P3626BRL	1.110.3601.2300
PG 42	32-38	37	15	57	P4238BRL	1.110.4201.0300
PG 42	25-31	37	15	57	P4231BRL	1.110.4201.2300
PG 48	37-44	38	15	64	P4844BRL	1.110.4801.0300
PG 48	29-35	38	15	64	P4835BRL	1.110.4801.2300

專利產品 Patented product.

